




Ceiling and wall luminaires
4051859955320
L 615, B 102, H 85

Ceiling mounting, Suspension cable/chain,
Wall (surface)
light grey (RAL 7035)

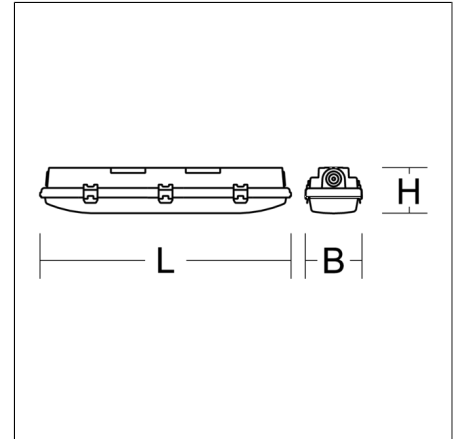

Classic moisture-proof diffuser luminaire with two-part luminaire design. For escape route illumination. Housing made of shockproof, UV-resistant plastic (polycarbonate). Injected silicone-based seal with increased resistance even under extreme conditions. Diffuser made of UV-resistant opal plastic (PMMA) with excellent light transmission of up to 90% Diffuser fixed by stainless steel clips for easy installation and opening. Symmetrical light distribution. Homogeneous light distribution. Flexible and easy installation thanks to sliding quick-fix brackets made of stainless steel and diffuser with integrated gear tray as well as variable cable entry (face or rear sided). Suitable for Ceiling mounting, Suspension cable/chain, Wall (surface). Ceiling mounting stainless steel brackets and triangular brackets for pendant mounting included in delivery. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Length L	615 mm
Width B	102 mm
Height H	85 mm
Weight	1.2 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux, mains operation	2200 lm
System power, mains operation	15 W
Rated luminous flux, emergency operation	860 lm
System power, emergency operation	9 W
System efficiency	147 lm/W
Glare evaluation UGR (4H 8H)	24,9
Beam angle	down 126°/105° up 180°/180°
Rated life	100000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	20
Luminaires on B16A fuse	33
Luminaires on C10A fuse	34
Luminaires on C16A fuse	56
Inrush current / Inrush current duration	17 A / 244 µs
CIE Flux Code / CEN Flux Code	43 73 91 93 100
Type of protection	IP 66
Protection class	I
Filament test	650 °C
Impact resistance	IK04
Ambient temperature for maintained power	-10 °C ... + 35 °C
Safety marks	D-mark
Conformity mark	CE, EAC