




## **AMATBLEDOCTOW/RGBTW**

OCTO Mattone Connected by WiZ

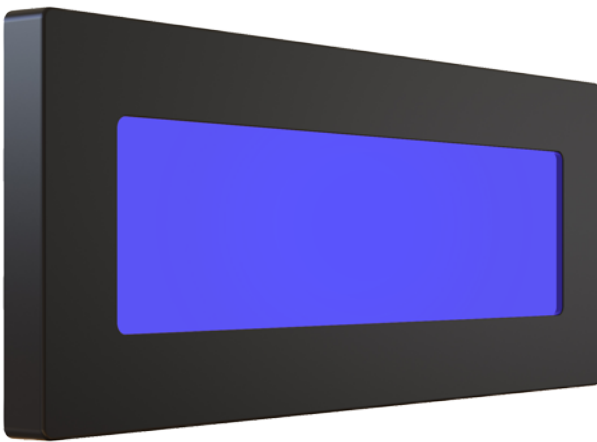

Universal polycarbonate LED bricklight suitable for residential and hospitality applications

Create the ambience of your choice with 16 million colours, as well as warm to cool white light

Connects directly to your WiFi network using Bluetooth technology to support seamless pairing

Tunable between 2700K - 6500K via WiZ app and voice control

Unique adjustable feet allows for installation into multiple brick apertures ranging from 85mm to 115mm

Polycarbonate construction ideal for coastal applications

Pre-wired with 500mm of rubber insulated cable

Supplied c/w installation housing for additional protection and ease of installation

Wall box accessory available allowing fitting to be surface mounted

Please consider WiFi signal strength for this product

Technical Specifications:

Light Source | LED

Colour / Finish | [Black]

Material | [Polycarbonate]

Dimmable | Yes

Dimmable Type | [OCTO WiZ]

IP Rating | IP65

IK Rating | IK06

Mounting Option | [Recessed]

Class Protection | 1

Internal / External | External

OCTO Category | OCTO embedded WiZ Connected

WiFi Enabled | Yes

Warranty (Years) | 3

CE Mark | Yes

UKCA Mark | Yes

Length | 261

Width | 106

Height | 75.4

Cable Length | 600mm

Wattage | 4W

Lumens Delivered | 75lm - 80lm (2700K - 6500K)

Lumens Delivered Category | 0-500lm

lm/W | 20lm/w

lm/W Category | [<100lm/W]

Beam Angle | 100

CRI | 80

CCT | 2700-6500K

Input | 220/240V

Hertz | 50/60Hz

Operating Temp | -10°C - 40°C

SDCM | 6

Inrush Current | 1.2A 13.85ns

Lumen Depreciation | L70 36,000h

Lumen Depreciation L70 B50 | L70 B50 36,000h

## Technical Data - ETIM - Electrical accessories for luminaires (EC002556)

Type of accessory	Other
Colour	Black
Number of cores	0

Datasheet generated from <https://onetimepim.com> last updated Friday, February 16, 2024 5:16:53 PM

