



FLAT POLYMERO

311626.002.8 | Ceiling and wall luminaires

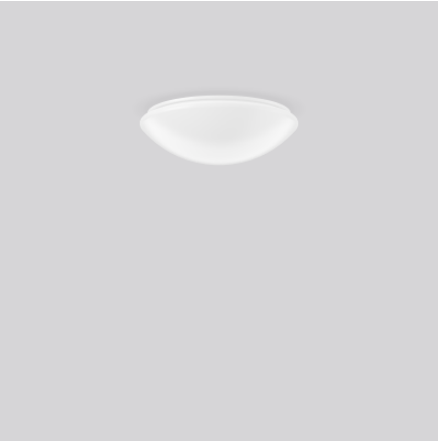

Ceiling and wall luminaires
4051859073635
D 300, H 100

Ceiling mounting, Wall (surface)
white

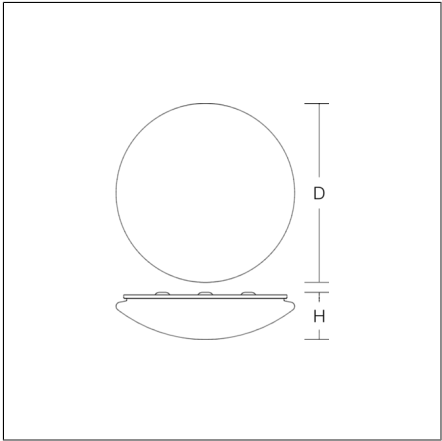

Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	300 mm
Height H	100 mm
Weight	0.92 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1100 lm
System power	10 W
System efficiency	110 lm/W
Glare evaluation UGR (4H 8H)	19,7
Beam angle	down 119° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	8
Luminaires on B16A fuse	13
Luminaires on C10A fuse	14
Luminaires on C16A fuse	23
Inrush current / Inrush current duration	54 A / 250 µs
CIE Flux Code / CEN Flux Code	41 70 89 88 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



08-311623.022
Replacement diffuser