

Cesar Stroll B

THORN

96700261 CESAR STROLL B H950 1L930 S/S HFX ANT

LED 35W CESA_STROLL_930	IP65	IK10			
-------------------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--


Cesar Stroll B

Cesar Stroll B a free-standing, decorative LED bollard. Symmetric super-narrow distribution luminaire (superspot beam) distribution. DALI-2 dimmable LED driver. Class II electrical, IP65, Impact strength: IK10. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø200 x 950 mm
Luminaire input power: 35.1 W
Luminaire luminous flux: 1941 lm
Luminaire efficacy: 55 lm/W
Weight: 10.61 kg



TLG_CESA_F_STROLL_B_950_ANT.jpg

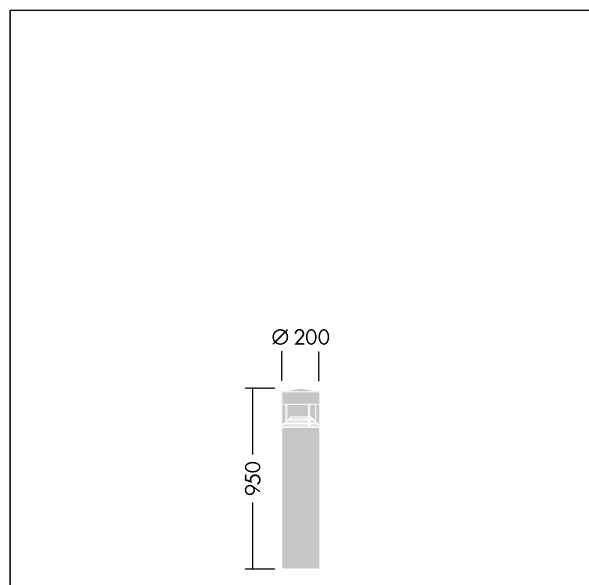

TLG_CESA_M_STROLL_H950.wmf

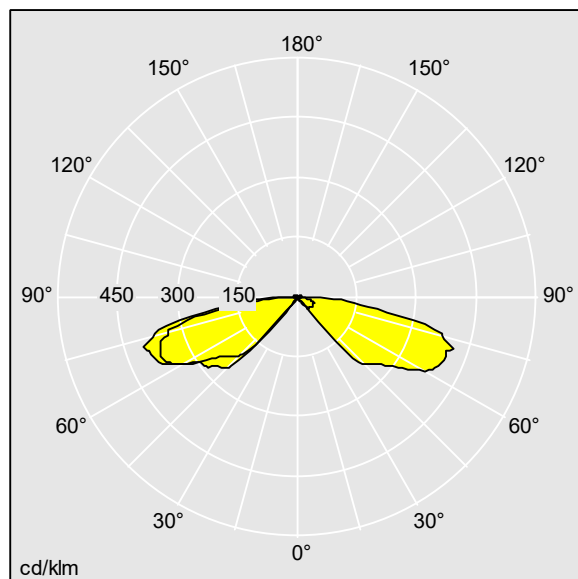

96700261.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1941 lm
Luminaire efficacy*: 55 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 35.1 W
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,04 DLOR: 0,96

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting