




Wall luminaires
4051859700777
L 100, B 154, H 311

Wall (surface)
anthracite metallic (DB703)

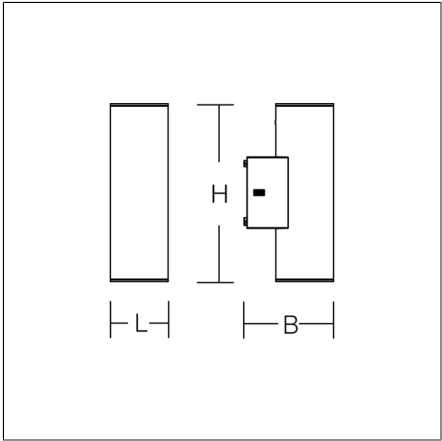

Wallscapeing: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. Light emission upwards and downwards, superspot/wide flood. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System. Electrical plug and play featuring quick connector. Cable entry granting two cables for loop-through. Driver integrated.

Product specifications

Length L	100 mm
Width B	154 mm
Height H	311 mm
Weight	2.2 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	310 lm
System power	6.2 W
System efficiency	50 lm/W
Glare evaluation UGR (4H 8H)	14,4
Beam angle	down 37°/37°/38°/37° up 14°/2°/19°/2°
Rated life	50000 h (L70)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 2
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	39
Luminaires on B16A fuse	63
Luminaires on C10A fuse	39
Luminaires on C16A fuse	63
Inrush current / Inrush current duration	30 A / 30 µs
CIE Flux Code / CEN Flux Code	90 99 100 70 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK07
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC

Accessories



982768.003
Safety glass. Blanking cover.



982768.023
Safety glass. Centre: satin finish d64 mm.



982768.013
Safety glass. Centre: transparent d64 mm.



982768.033
Safety glass. Centre: transparent with pressed glass lens Superspot.

Spareparts



982768.013
Safety glass. Centre: transparent d64 mm.



982768.033
Safety glass. Centre: transparent with pressed glass lens Superspot.