




Recessed ceiling and wall luminaires
4068754004015
L 1701, B 71, H 2

Recessed ceiling mounting, wall (recessed)
silver, matt (approx. RAL 9006)

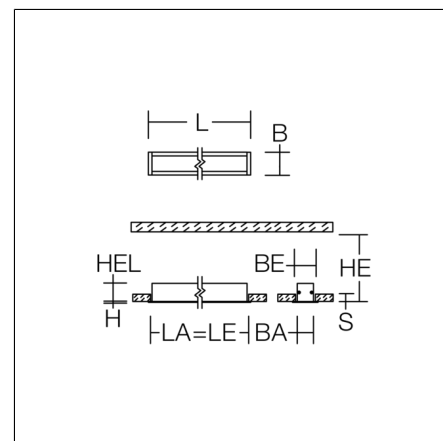

Linear recessed ceiling and wall luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Ceiling installation with pre-assembled SBS mounting system. Suitable for Recessed ceiling mounting, wall (recessed). LED unit with integrated converter interchangeable and removable. With sensors or as a safety luminaire on request.

Product specifications

Length L	1701 mm
Width B	71 mm
Height H	2 mm
Cut-out length LA	1688 mm
Cut-out width BA	60 mm
Luminaire: recess height HEL	75 mm
Ceiling thickness S	10-30 mm
Installation space length LE	1688 mm
Installation space width BE	100 mm
Installation space height HE	100 mm
Weight	3.8 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	4850 lm
System power	40 W
System efficiency	121 lm/W
Glare evaluation UGR (4H 8H)	26,3
Beam angle	106°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	15
Luminaires on B16A fuse	24
Luminaires on C10A fuse	24
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	26 A / 215 µs
CIE Flux Code / CEN Flux Code	48 79 95 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 30 °C
Conformity mark	CE, EAC