

96700285 CESAR STRUT H3500 1L930 S/S HFX ANT

LED 55W CESA_STRU_930	IP65	IK10			
-----------------------	------	------	---	---	--


Cesar Strut

Cesar Strut a free-standing, architectural LED luminaire for decorative facade lighting, Symmetric super-narrow distribution luminaire (superspot beam) distribution. DALI-2 dimmable LED driver. Class II electrical, IP65, Impact strength: IK10. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø200 x 3500 mm
 Luminaire input power: 55 W
 Luminaire luminous flux: 4235 lm
 Luminaire efficacy: 77 lm/W
 Weight: 31.28 kg



TLG_CESA_F_STRUT_3500_ANT.jpg

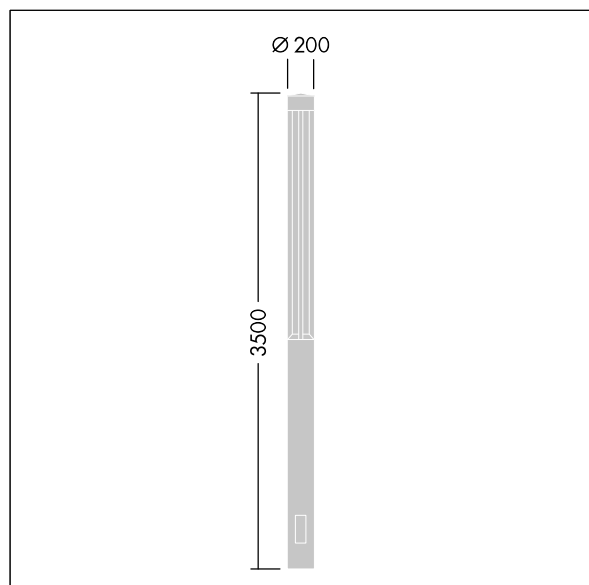

TLG_CESA_M_STRUT_H3500.wmf

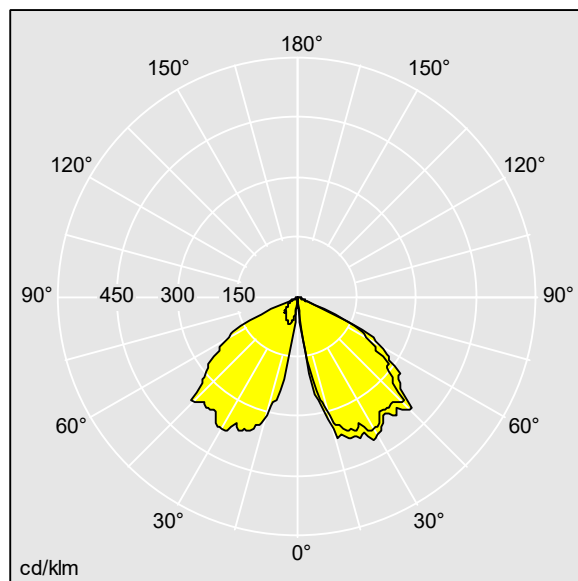

96700285.ltd

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 4235 lm
 Luminaire efficacy*: 77 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 55 W
 Dimming: Dali2Dim
 LOR: 1,00 ULOR: 0,02 DLOR: 0,98

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting