


TX-MOVE

742164.002.3 | Surface mounted projector



Surface mounted projectors
4051859971856
L 569, B 119, H 75

Track on ceiling
traffic white, matt (RAL 9016)

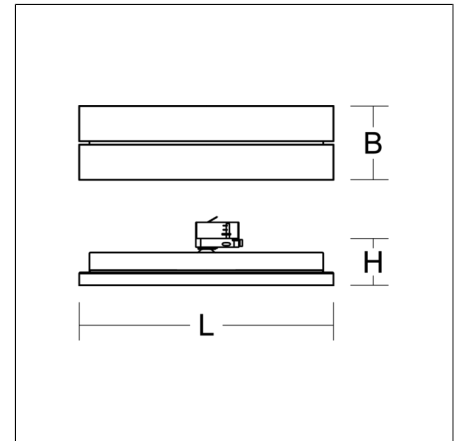

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with flush-mounted opal diffuser made of non-yellowing PMMA. Symmetrical wide beam light emission. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components.

Product specifications

Length L	569 mm
Width B	119 mm
Height H	75 mm
Weight	2.05 kg
Light source	LED
Colour temperature	3500 K
Rated luminous flux	5100 lm 6950 lm 8500lm
System power	41 W 57 W 73W
System efficiency	116 lm/W 122 lm/W 124lm/W
Glare evaluation UGR (4H 8H)	28,1 29,2 29,9
Beam angle	112°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	8
Luminaires on B16A fuse	13
Luminaires on C10A fuse	13
Luminaires on C16A fuse	21
Inrush current / Inrush current duration	53 A / 220 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 25 °C
Conformity mark	CE

TX-MOVE

742164.002.3 | Surface mounted projector



Accessories



70319.002

Point outlet for 3-circuit multi adaptor