


# LIGHTSTREAM maxi

721725.114.76 | Spotlights



Spotlights  
4051859140863  
L 509, B 374, H 174

Pole mounting  
silver, matt (approx. RAL 9006)

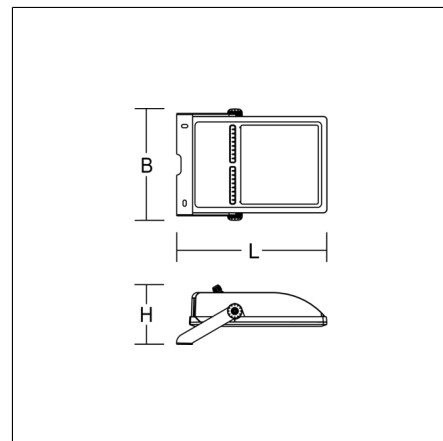





















LED floodlight for accent and area lighting. Housing made of corrosion-resistant die-cast aluminium for outdoor use, powder-coated. Stainless steel bracket, powder coated, suitable for pole mounting. Tilt angle can be adjusted and locked in 6° steps with precise angular scale. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Asymmetrical reflector made of MIRO-SILVER®. COB LED with socket for easy replacement. Toughened glass cover. Asymmetrical light distribution. Thermally decoupled driver compartment. Piano-key terminal up to 5 x 2,5 mm², max cable Ø 13 mm. Wind-exposed area  $A_w = 0.052 \text{ m}^2$ . Qualified for use in the food and drink industry.


## Product specifications

Length L	509 mm
Width B	374 mm
Height H	174 mm
Weight	12.1 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	26600 lm
System power	221 W
System efficiency	120 lm/W
Glare evaluation UGR (4H 8H)	43,6
Beam angle	70°/45°/0°/45°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B16A fuse	2
Luminaires on C16A fuse	4
Inrush current / Inrush current duration	75 A / 450 µs
CIE Flux Code / CEN Flux Code	29 69 97 100 100
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK08
Ambient temperature	-40 °C ... + 35 °C
Safety marks	D-mark
Conformity mark	CE, EAC

## Accessories

	982053.004 Mounting bracket for attachment to floor, wall and ceiling.		982003.000 Pole attachment (double): for spigot 76 mm, unpainted
	982003.004 Pole attachment (double): for spigot 76 mm, silver, matt (approx. RAL 9006)		982004.000 Pole attachment (double): for spigot 89 mm, unpainted
	982004.004 Pole attachment (double): for spigot 89 mm, silver, matt (approx. RAL 9006)		982005.000 Pole attachment (double): for spigot 108 mm, unpainted
	982005.004 Pole attachment (double): for spigot 108 mm, silver, matt (approx. RAL 9006)		982002.000 Pole attachment (single): for spigot 76 mm, unpainted
	982002.004 Pole attachment (single): for spigot 76 mm, silver, matt (approx. RAL 9006)		982045.000 Pole attachment (single): for spigot 60 mm, unpainted
	982045.004 Pole attachment (single): for spigot 60 mm, silver, matt (approx. RAL 9006)		982046.000 Pole attachment (single): for spigot 89 mm, unpainted
	982046.004 Pole attachment (single): for spigot 89 mm, silver, matt (approx. RAL 9006)		982059.000 Pole attachment (double): for spigot 60 mm, unpainted
	982059.004 Pole attachment (double): for spigot 60 mm, silver, matt (approx. RAL 9006)		982401.004 Adapter set for 3-fold configuration (3 x 120°)
	982475.004 Adapter set for 2-fold configuration (2 x 90°)		982525.004 Adapter set for 4-fold configuration (4 x 90°)
	982478.004 Pole clip for pole diameter 95 - 140 mm		982638.003 Junction box H with strain relief.

## Spareparts

	981984.004 Front frame with safety pane
--	--