


TRIPACT LED P 4050LM PMMA DALI I KL. IP40/ IP20

595X595 840 (42W)

DETAILED CARD

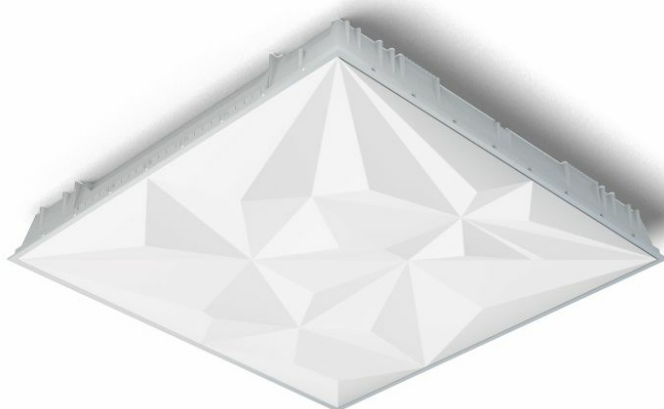

TECHNICAL PARAMETERS

Index:	658198
Ingress protection:	IP40/20
Nominal power [W]:	42
Luminous flux [lm]*:	4050
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	ABS
Diffuser material:	PMMA
Diffuser type:	OPAL

CHARACTERISTICS

TRIPACT LED is a combination of proven LED solutions with remarkable DESIGN. Luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted opal diffuser. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus.

TRIPACT LED P 4050LM PMMA DALI I KL. IP40/ IP20

595X595 840 (42W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Index:	658198	Colour of the body:	white
Colour temperature [K]:	4000	Dimensions (H/W/T/S) [mm]:	595/595/93
Light source:	LED module	Mounting dimensions [mm]:	595/595
Luminous flux [lm]:	4050	Ingress protection:	IP40/20
Nominal power [W]:	42	Mounting version:	recessed
Diffuser type:	OPAL	Working temperature [°C]:	from -25 to +35
Rated power of the luminaire [W]:	43	Net weight [kg]:	1.900
DIMM DALI:	yes	EAN:	5905963658198
Supply voltage [V]:	220-240	Category type:	louvres
Energy efficiency class:	E	AC voltage range [V]:	198 - 264
Frequency [Hz]:	50 - 60	DC voltage range [V]:	176 - 276
Luminous efficacy [lm/W]:	94	LED lifespan L80B20 [h]:	84000
Electrical protection class:	I	LED lifespan L90B10 [h]:	42000
Colour rendering index:	>80	Light distribution type:	lambertian
SDCM:	≤ 3	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Power factor:	0.95	Warranty [years]:	5
LED lifespan L70B50 [h]:	132000	Warranty [years]:	5
Diffuser material:	PMMA	Manual:	Download PDF
Diffuser colour:	white	CE certificate:	251/2023
Material of the body:	ABS	Plik LDT:	Download


TRIPACT LED P 4050LM PMMA DALI I KL. IP40/ IP20

595X595 840 (42W)


DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
658372	Diffuser TRIPACT
999543	Plasterboard recessing kit 630x630 white (steel version)



Diffuser TRIPACT (658372)



Plasterboard recessing kit 630x630 white (steel version) (999543)

Card creation date: 03 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%



This product is a subject to electric and electronic waste equipment regulations (WEEE).



Certificate CE - Nr: 251/2023



Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl