



CENTRYXX IP40

672582.002.07 | Stand-by luminaires for escape route illumination

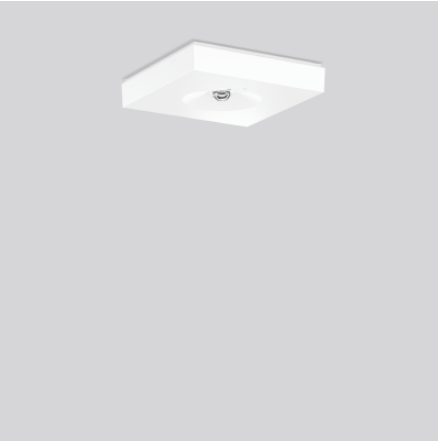

Ceiling luminaires
4051859869252
L 150, B 150, H 30

Ceiling mounting
white

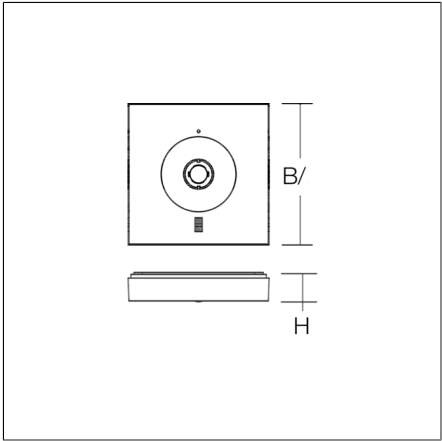

Flat, square surface-mounted luminaire. For escape route illumination. Housing: plastic (polycarbonate). Cover: polycarbonate. Plastic lenses for area lighting and escape route illumination included in scope of delivery. Lenses can be replaced without tools. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system.


Product specifications

Type of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	LiFePO4
Duration	3 h, 8 h
Operating mode	non-maintained power mode
Length L	150 mm
Width B	150 mm
Height H	30 mm
Weight	378 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux, emergency operation	3 h: 240 lm 8 h: 120 lm
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast in emergency mode only
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Type of protection	IP 40
Protection class	II
Ambient temperature for non-maintained power mode	0 °C ... + 25 °C
Conformity mark	CE

Accessories



982949.002
Mounting set for through wiring surface installation



982954.002
Recessed mounting frame



982792.002
Optic lenses



983086.000
Asymmetrical lens for areas to be highlighted

CENTRYXX IP40

672582.002.07 | Stand-by luminaires for escape route illumination



983172.000

Square area lens for anti-panic lighting

982341.002.1

Mounting kit for chains/cable suspensions