

Axyl Gild

THORN

96701571 AXYL GILD S 1W 1L 830 WB RD ANT

LED 4W AXYL_GILD_S_WB830 IP65 IK06  


Axyl Gild

Axyl Gild, a wall mounted, architectural LED luminaire for decorative facade lighting, with wide beam distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 120 x 120 x 140 mm
Luminaire input power: 4 W
Luminaire luminous flux: 38 lm
Luminaire efficacy: 10 lm/W
Weight: 1.58 kg



TLG_AXYL_F_GILD_ANT.jpg

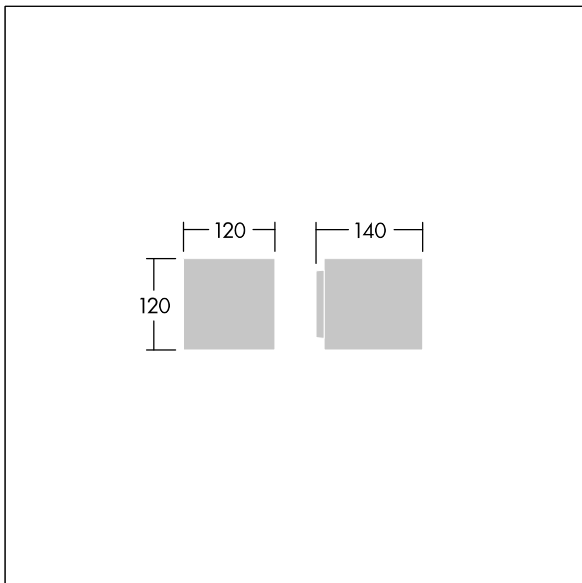

TLG_AXYL_M_GILD_S.wmf

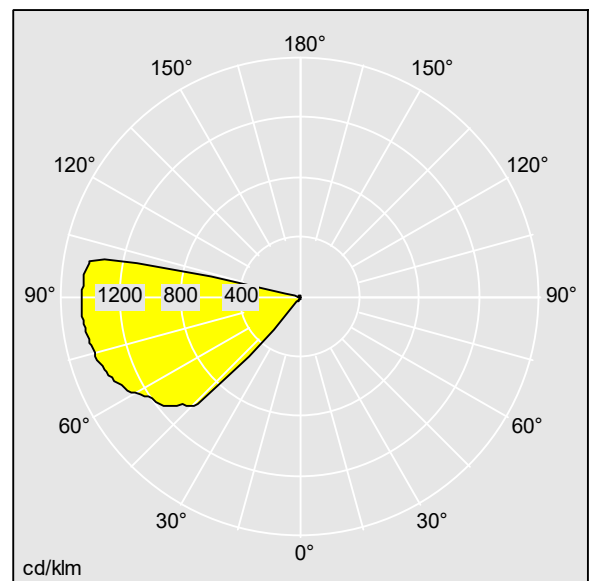

96701571.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 38 lm
Luminaire efficacy*: 10 lm/W
Colour Rendering Index min.: 80
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 4 W Power factor = 0.58
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,25 DLOR: 0,75

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting