


FLAT SLIM disc

312650.004.730 | Pendant luminaires



Pendant luminaires
4051859803072
D 380, H 75

pendant
silver, matt (approx. RAL 9006)

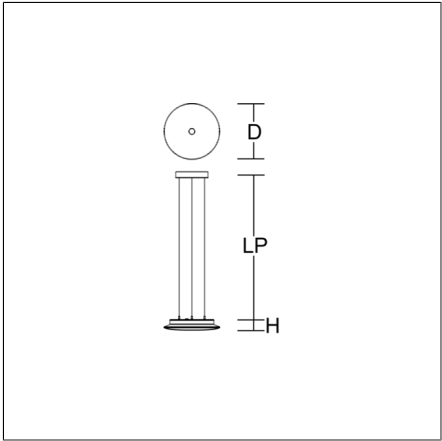

Decorative round LED pendant luminaire. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Canopy made of aluminium, powder-coated. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiColour: Colour temperature individually adjustable either 3000 K or 4000 K via switching element. Factory setting is 3000 K. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download.

Product specifications


Diameter D	380 mm
Height H	75 mm
Suspension length LP	500-1500 mm
Weight	4.8 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 1150 lm 2450 lm
	4000 K: 1150 lm 2500 lm
System power	3000 K: 11 W 24 W
	4000 K: 11 W 24 W
System efficiency	3000 K: 105 lm/W 102 lm/W
	4000 K: 105 lm/W 104 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 18,4 21,1
	4000 K: 18,4 21,1
Beam angle	down 116° up 130°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	44 75 93 79 100
Protection class	I
Filament test	960 °C
Impact resistance	IK02
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

FLAT SLIM disc

312650.004.730 | Pendant luminaires



Spareparts



982971.002
Replacement LED module



982902.002
Replacement glass