


# Topline EVO CCT

- High performance, multi-wattage LED CCT batten suitable for industrial and multi-purpose applications
- Selectable CCT between 3000K, 4000K and 5700K
- High efficiency up to 140 lm/W
- Power selectable; offering high and low output option in each length
- Excellent light uniformity through high transmittance polycarbonate diffuser
- Instant light output with unlimited switching
- Innovative spring clip gear tray release aids fast and easy installation
- Self-test, lithium emergency as standard
- Dimmable and Smart options available
- Powered by Tridonic



Powered by CASAMBI

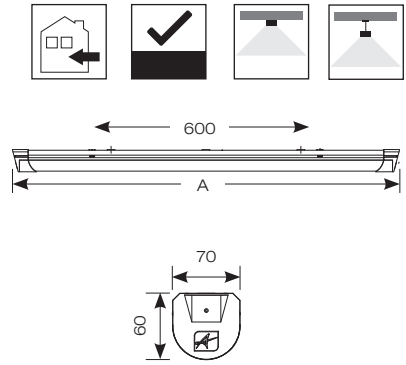

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220/240V	50Hz	-10°C to 40°C	L70 54,000	Ra 80	6	105/140°	1	IP20	IK06

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
ATLEVO4	CCT Selectable - 1200mm	18/31W	3000K/4000K/5700K	2500/4300lm (4000K)		1220mm	£95.00
ATLEVO5	CCT Selectable - 1500mm	24/43W	3000K/4000K/5700K	3300/6000lm (4000K)	140lm	1525mm	£100.00
ATLEVO6	CCT Selectable - 1800mm	32/56W	3000K/4000K/5700K	4400/7800lm (4000K)		1745mm	£130.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/SM3	Self-Test emergency	+ £121.00
/DM3	DALI emergency	+ £205.00
/OCTO	OCTO Smart Control	+ £195.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/MWS	Integral Microwave Sensor	+ £60.00
/CF	Corridor Function	+ £130.00