


# CENTRYXX IP65

672170.002.4.07 | Stand-by luminaires for escape route illumination



Ceiling luminaires  
4051859767053  
L 198, B 198, H 38

Ceiling mounting  
white

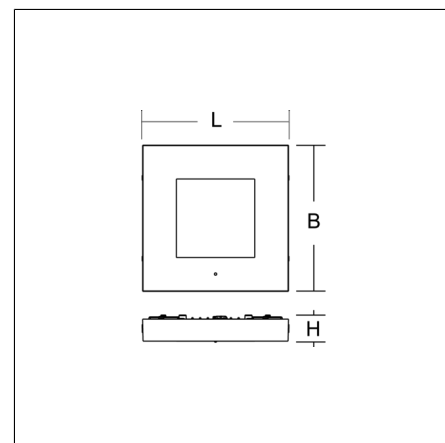

Flat, square surface-mounted luminaire. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With asymmetrical beam plastic lenses for illuminating rescue facilities. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected. Ball impact proof in accordance with DIN 18032-3. Qualified for use in the food and drink industry.

## Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	NiMh
Duration	3 h
Operating mode	maintained power mode
Length L	198 mm
Width B	198 mm
Height H	38 mm
Weight	1.04 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	450 lm
System power, mains operation	6,5 W
Rated luminous flux, emergency operation	380 lm
System efficiency	69 lm/W
Glare evaluation UGR (4H 8H)	18,5
Beam angle	28°/32°/0°/32°
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	0.12 A / 5000 µs
CIE Flux Code / CEN Flux Code	74 93 100 100 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	5 °C ... + 30 °C
Ambient temperature for non-maintained power mode	5 °C ... + 30 °C
Safety marks	D-mark
Conformity mark	CE