



MASTER LEDtube EM/ Mains T8



MASTER LEDtube 600mm HO 7.6W865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Warnings and Safety

• -

Product data

General Information	
Cap-Base	G13 ROT
Nominal lifetime	75,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	160 degree(s)
Luminous Flux	1,150 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	151 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	7.6 W
Lamp Current (Max)	40 mA
Lamp Current (Min)	30 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	18 W
Inrush current at mains	7
Max. lamp no. on MCB B type 10A - Mains	105
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	125

MASTER LEDtube EM/Mains T8

Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	30
Max. lamp no. on MCB B type 16A – Mains	170
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	290
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	49
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	50 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	600 mm
Bulb Shape	T8
Net Weight (Piece)	0.095 kg

Approval and Application

Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate ENEC certificate

Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	2144217
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	0.1
Stroboscopic effect visibility measure (SVM)	0.1
Ambient temperature range	-20 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	MAS LEDtube 600mm HO 7.6W865 T8
Full product name	MASTER LEDtube 600mm HO 7.6W865 T8
Full product code	872110304419800
Order code	04419800
Material Nr. (12NC)	929004260402
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8721103044198
Numerator – Packs per outer box	10
EAN/UPC – Case	8721103044204



Dimensional drawing

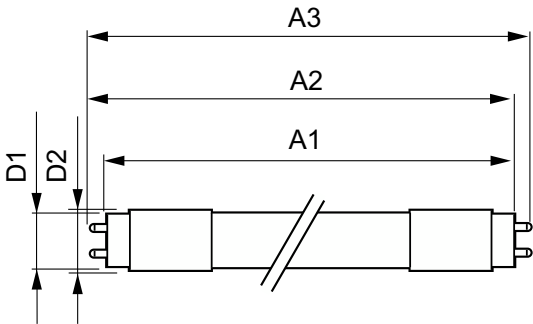

Product	D1	D2	A1	A2	A3
MAS LEDtube 600mm HO 7.6W865 T8	25.8 mm	28 mm	588.5 mm	595.5 mm	602.5 mm


MASTER LEDtube EM/Mains T8

Photometric data

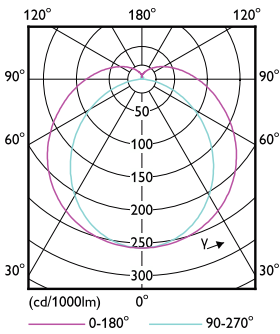


General uniform lighting - MAS LEDtube 600mm HO 7.6W865 T8

Light Distribution Diagram - MAS LEDtube 600mm HO 7.6W865 T8

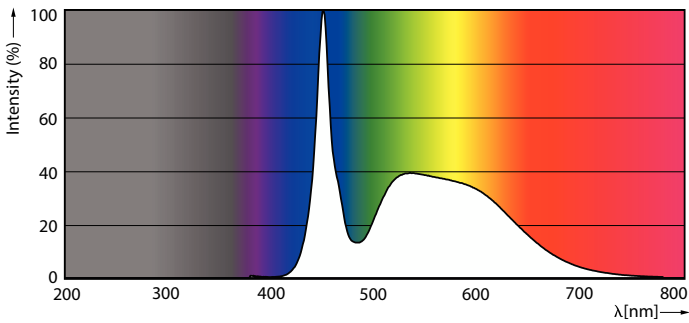


Spectral Power Distribution Colour - MAS LEDtube 600mm HO 7.6W865 T8

Lifetime

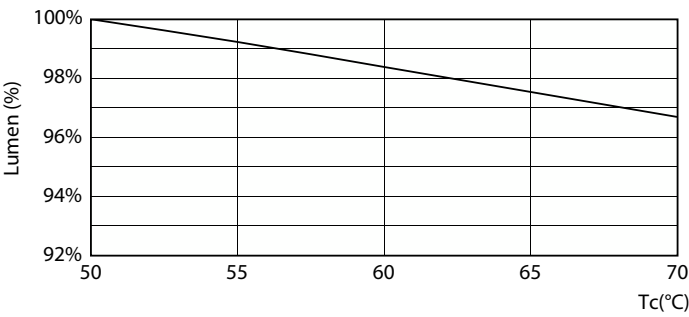

Lumen Maintenance Diagram - MAS LEDtube 600mm HO 7.6W865 T8

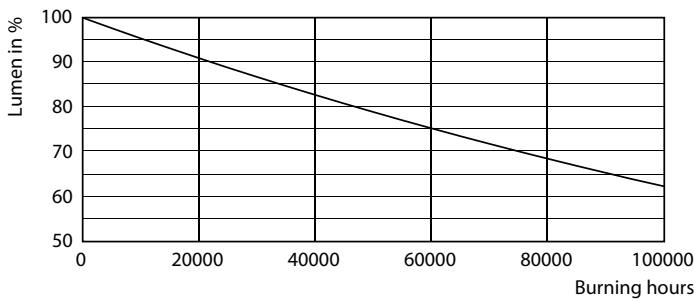

Lumen Maintenance Diagram - MAS LEDtube 600mm HO 7.6W865 T8

MASTER LEDtube EM/Mains T8

Lifetime



LEDtube-75K-5070-FailureRate-LED

Life Expectancy Diagram



LifetimeVsTc

