

Axyl Opera

96701799 AXYL OPERA M WO 4L 930 AS RD ANT


THORN

| | | | | | |
|------------------------|------|------|---|---|--|
| LED 7W AXYL_OP_M_AS930 | IP67 | IK09 |  |  | |
|------------------------|------|------|---|---|--|


Axyl Opera

AXYL Opera, a floor recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 135 x 135 x 135 mm
Luminaire input power: 7.1 W
Luminaire luminous flux: 488 lm
Luminaire efficacy: 69 lm/W
Weight: 1.64 kg

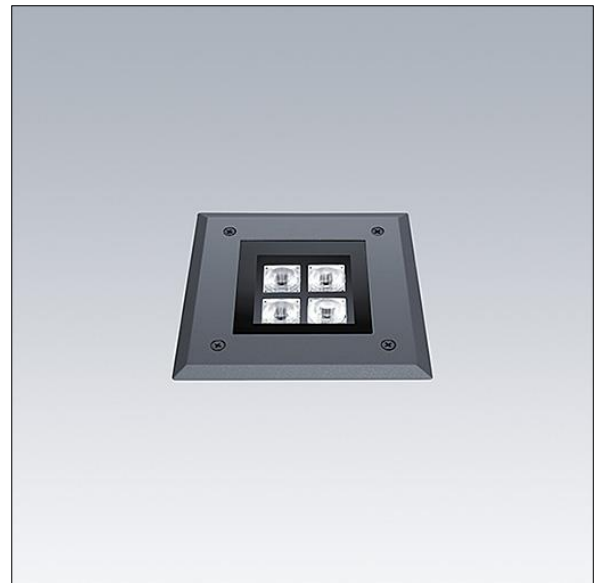

TLG_AXYL_F_OPERA_M_WO_AS_ANT.jpg

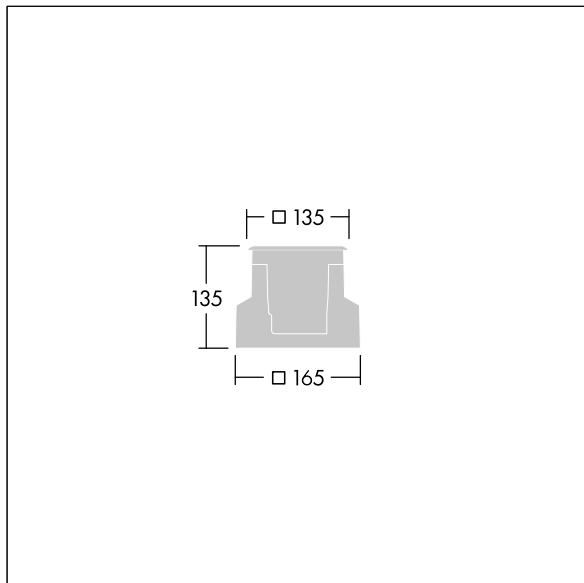

TLG_AXYL_M_OPERA_M.wmf

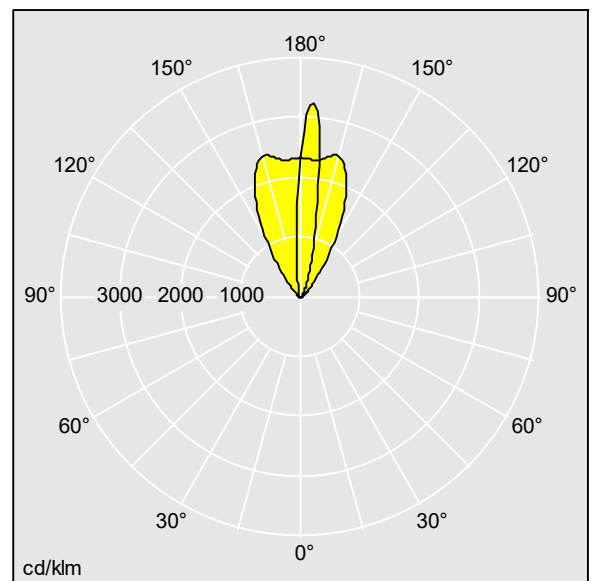

96701799.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 488 lm
Luminaire efficacy*: 69 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 7.1 W Power factor = 0.53
Dimming: Dali2Dim
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting