


FLAT POLYMERO IP44

221153.002.2.76 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859183761
D 305, H 115

Ceiling mounting, Wall (surface)
white

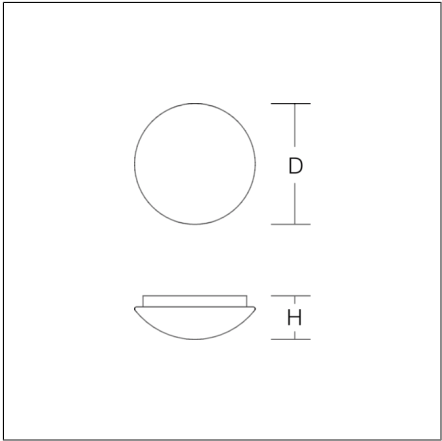

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: plastic. Diffuser made of plastic (polycarbonate), opal, shock-proof. Diffuser fastening: spring system. Suitable for Ceiling mounting, Wall (surface). IP 43 ceiling mounting, IP 44 wall mounting.

Product specifications

Diameter D	305 mm
Height H	115 mm
Weight	1.47 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1350 lm
System power	13 W
System efficiency	104 lm/W
Glare evaluation UGR (4H 8H)	20,7
Beam angle	down 118° up 180°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	131
Luminaires on B16A fuse	210
Luminaires on C10A fuse	131
Luminaires on C16A fuse	210
Inrush current / Inrush current duration	0.1 A / 10000 µs
CIE Flux Code / CEN Flux Code	42 71 89 90 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



08-5145.032
Replacement diffuser