


DEECOS S mini track-in

742249.002.1.730 | Surface mounted projector



Surface mounted projectors
4051859811190
D 87, H 135

Track on ceiling, Wall track
traffic white, matt (RAL 9016)

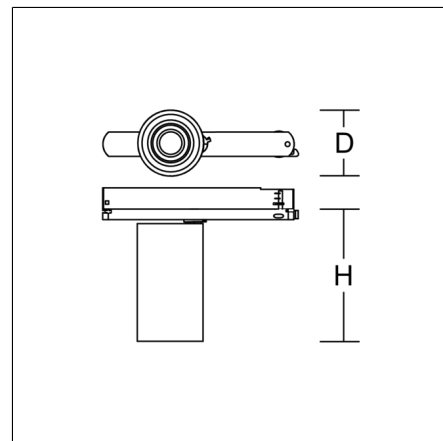

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with lens made of plastic (polycarbonate) for the best homogeneous light distribution - can be changed without tools. Best colour rendering index $R_a > 90$. Superspot version with small spot LED. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. Track-in driver integrated into the adaptor. High quality converter without flickering and stroboscopic effect. With Casambi smart+free Bluetooth® control for wireless network and operation using Android / iOS devices, free app available for download. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications

Diameter D	87 mm
Height H	135 mm
Weight	0.62 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2250 lm
System power	22 W
System efficiency	102 lm/W
Glare evaluation UGR (4H 8H)	9,4
Beam angle	15°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	smart+free (Bluetooth)
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	18 A / 2 µs
CIE Flux Code / CEN Flux Code	99 100 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	25 °C
Conformity mark	CE, EAC

DEECOS S mini track-in


742249.002.1.730 | Surface mounted projector



Accessories



982370.000
Diffuser, transparent



982371.003
Anti-glare honeycomb louvre



982421.002
White plastic ring for lens.




982369.043
Oval corridor lens



982370.010
Diffuser, satinated



982369.003
Spot lens



982368.003
Reflector spot



982419.002
White plastic ring for reflector.