



# Accentline

## Accentline 20W 4000h GU5.3 12V 36D 1CT/10X5F

Low-voltage halogen burner in glass reflector. Ideal solution for small decorative luminaires, putting your objects in the spotlight. Dichroic coating prevents heat transmission onto the object.

### Product data

General information	
Cap-Base	GU5.3 [ GU5.3]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life to 50% Failures (Nom)	4000 h
Nominal Lifetime (Nom)	4000 h
Switching Cycle	16000X
Rated Lifetime (Hours)	4000 h

Light technical	
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	205 lm
Luminous Intensity (Max)	500 cd
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	100
Luminous Flux in 90° Cone (Rated)	205 lm

Operating and electrical	
Power (Nom)	20 W
Starting Time (Nom)	0.0 s
Warm Up Time to 60% Light (Nom)	instant full light s
Voltage (Nom)	12 V


Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Bulb Shape	MR16 [ 2inch/50mm]

Approval and application	
Energy Consumption kWh/1000 h	21 kWh

Product data	
Full product code	871869658839000
Order product name	Accentline 20W 4000h GU5.3 12V 36D 1CT/10X5F
EAN/UPC - Product	8718696588390
Order code	926000850061
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	926000850061
Copy Net Weight (Piece)	0.006 kg


Dimensional drawing

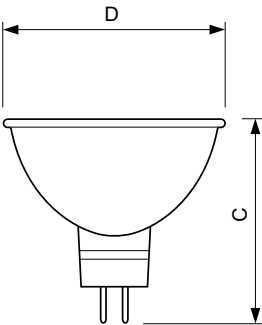

Accentline 20W 4000h GU5.3 12V 36D 1CT/10X5F

Product	D (max)	C (max)
Accentline 20W 4000h GU5.3 12V 36D 1CT/10X5F	51 mm	46 mm

Photometric data

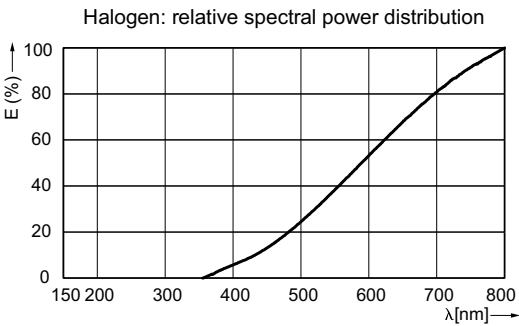

Consumer Lamps, Halogen, Spectral power distribution

