



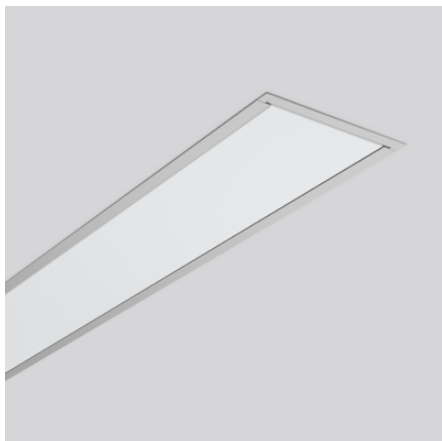

Recessed ceiling and wall luminaires  
4051859972853  
L 1707, B 124, H 2

Recessed ceiling mounting  
silver, matt (approx. RAL 9006)

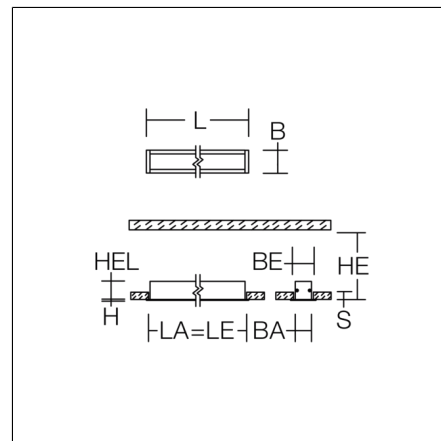

Linear recessed ceiling and wall luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA) microprismatic. Specially matched 2-component optical system for glare-free light at the workstation (suitable for use in environments with computer screens in accordance with EN 12464-1). Ceiling installation with pre-assembled SBS mounting system. Suitable for Recessed ceiling mounting. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring.

## Product specifications

|                                              |                            |
|----------------------------------------------|----------------------------|
| Length L                                     | 1707 mm                    |
| Width B                                      | 124 mm                     |
| Height H                                     | 2 mm                       |
| Cut-out length LA                            | 1692 mm                    |
| Cut-out width BA                             | 115 mm                     |
| Luminaire: recess height HEL                 | 103 mm                     |
| Ceiling thickness S                          | 10-30 mm                   |
| Installation space length LE                 | 1692 mm                    |
| Installation space width BE                  | 115 mm                     |
| Installation space height HE                 | 103 mm                     |
| Weight                                       | 5.04 kg                    |
| Light source                                 | LED                        |
| Colour temperature                           | 3000 K                     |
| Rated luminous flux                          | 3250 lm                    |
| System power                                 | 26 W                       |
| System efficiency                            | 125 lm/W                   |
| Glare evaluation UGR (4H 8H)                 | 18                         |
| Beam angle                                   | 80°/82°                    |
| Rated life                                   | 50000 h (L90/B50)          |
| Colour rendering index (CRI)                 | 80                         |
| Colour tolerance                             | 3                          |
| Photobiological safety according to EN 62471 | Risk group 1               |
| Driver                                       | Converter, dimmable        |
| Control                                      | DALI                       |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 16                         |
| Luminaires on B16A fuse                      | 26                         |
| Luminaires on C10A fuse                      | 27                         |
| Luminaires on C16A fuse                      | 44                         |
| Inrush current / Inrush current duration     | 26 A / 140 µs              |
| CIE Flux Code / CEN Flux Code                | 67 91 98 99 100            |
| Type of protection                           | IP 20                      |
| Protection class                             | I                          |
| Filament test                                | 650 °C                     |
| Impact resistance                            | IK03                       |
| Ambient temperature                          | -20 °C ... + 35 °C         |
| Conformity mark                              | CE                         |