




Ceiling and wall luminaires
4051859254966
D 300, H 95

Ceiling mounting, Wall (surface)
brushed stainless steel

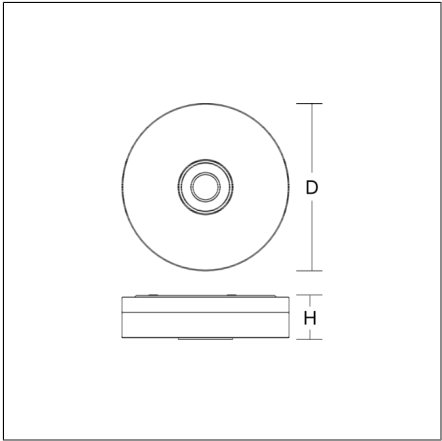

Decorative round surface-mounted luminaire. Base: brushed stainless steel. Mouth-blown, 3-layer opal glass, satin finish. With decorative screen, aluminium. Patented spring fastening system. Suitable for Ceiling mounting, Wall (surface). For recessed ceiling and recessed wall applications the recess housing must be ordered separately.

Product specifications

Diameter D	300 mm
Height H	95 mm
Weight	3.32 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1850 lm
System power	19 W
System efficiency	97 lm/W
Glare evaluation UGR (4H 8H)	22,4
Beam angle	down 128° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	77
Luminaires on B16A fuse	124
Luminaires on C10A fuse	77
Luminaires on C16A fuse	124
Inrush current / Inrush current duration	0.22 A / 10 µs
CIE Flux Code / CEN Flux Code	40 70 90 84 100
Type of protection	IP 40
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC

Accessories



981892.000
Semi-recess housing for cavity walls