


FLAT SLIM round

312132.0031.1.191 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859183150
D 230, H 63

Ceiling mounting, Wall (surface)
anthracite metallic (DB703)

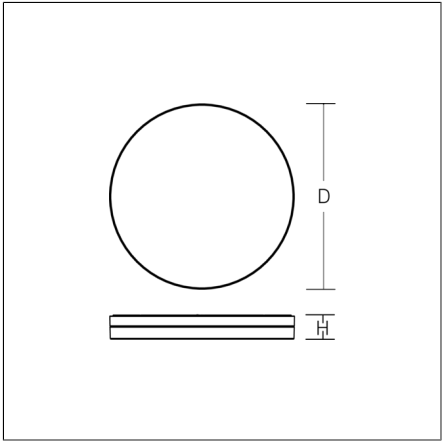

Decorative round LED surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Slave luminaire. Can only be operated in combination with corresponding master luminaire.

Product specifications

Diameter D	230 mm
Height H	63 mm
Weight	1.35 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1000 lm
System power	13 W
System efficiency	77 lm/W
Glare evaluation UGR (4H 8H)	20,9
Beam angle	down 124° up 180°
Rated life	50000 h (L70/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 230 V / 50 - 60 Hz
Luminaires on B10A fuse	114
Luminaires on B16A fuse	182
Luminaires on C10A fuse	114
Luminaires on C16A fuse	182
Inrush current / Inrush current duration	0.15 A / 10000 µs
CIE Flux Code / CEN Flux Code	42 72 92 89 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC

FLAT SLIM round


312132.0031.1.191 | Ceiling and wall luminaires



Spareparts



983181.002
Replacement glass



E90-6843.000.1