


FLAT POLYMERO

311974.002.1 | Pendant luminaires



Pendant luminaires
4051859129875
D 360, H 100

pendant
white

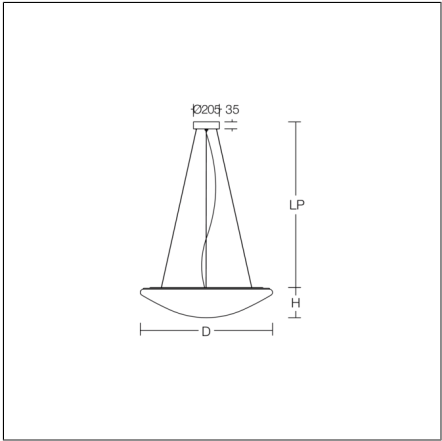

Decorative round LED pendant luminaire. Base and canopy: metal, powder-coated, white. Canopy Ø 205 mm, h 35 mm. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request.

Product specifications


Diameter D	360 mm
Height H	100 mm
Suspension length LP	200-1300 mm
Weight	3.42 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1950 lm
System power	19 W
System efficiency	103 lm/W
Glare evaluation UGR (4H 8H)	20,3
Beam angle	down 115° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	84
Luminaires on B16A fuse	135
Luminaires on C10A fuse	84
Luminaires on C16A fuse	135
Inrush current / Inrush current duration	0.22 A / 200 µs
CIE Flux Code / CEN Flux Code	43 72 90 89 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO

311974.002.1 | Pendant luminaires



Spareparts



08-311161.012
Replacement diffuser