

# Cesar Amp

96700117 CESAR AMP L DWN 1L930MBHFX ANT

THORN

|                        |      |      |   |    |  |
|------------------------|------|------|---|----|--|
| LED 34W CESA_AMP_L_930 | IP65 | IK08 |  | CE |  |
|------------------------|------|------|---|----|--|


## Cesar Amp

Cesar Amp a wall mounted, architectural LED luminaire for decorative facade lighting, medium beam distribution. DALI-2 dimmable LED driver. Class I electrical, IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø200 x 450 mm  
Luminaire input power: 34.4 W  
Luminaire luminous flux: 2537 lm  
Luminaire efficacy: 74 lm/W  
Weight: 8.2 kg



TLG\_CESA\_F\_AMP\_DWN\_WB\_ANT.jpg

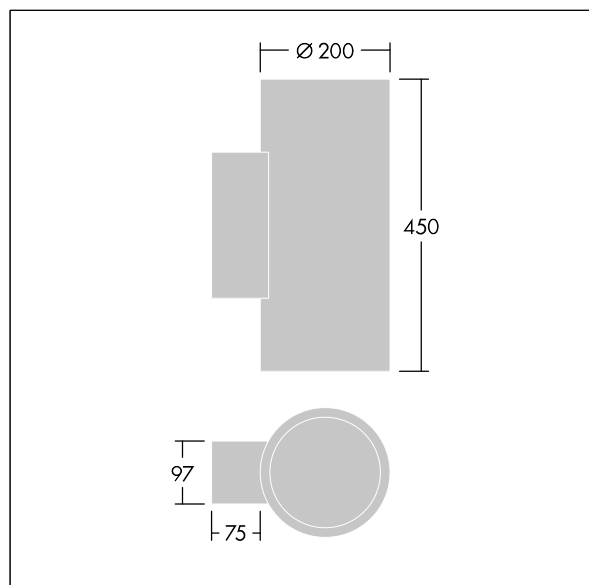

TLG\_CESA\_M\_AMP\_L\_DWN.wmf

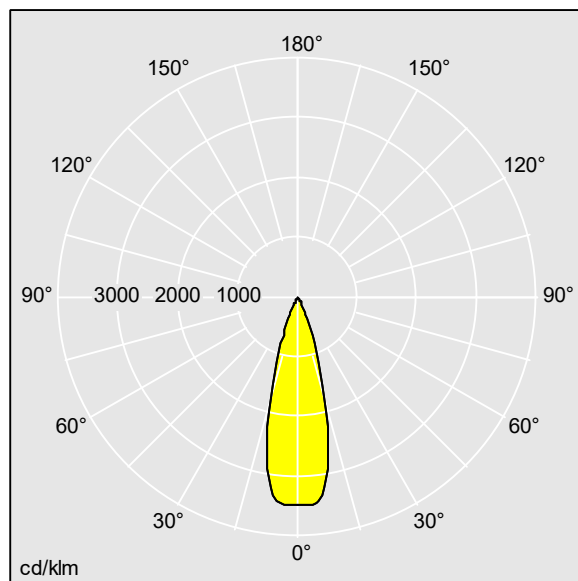

96700117.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 2537 lm  
Luminaire efficacy\*: 74 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 34.4 W  
Dimming: Dali2Dim  
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting