

CORIA 5050LM 600MM DALI I KL IP20 ZWIESZANY BIAŁY MAT 840 (50W)

DETAILED CARD



TECHNICAL PARAMETERS

Index:	555343
Ingress protection:	IP20
Nominal power [W]:	50
Luminous flux [lm]*:	5050
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	E
Material of the body:	powder coated steel
Colour of the body:	white mat
Diffuser material:	PS

CHARACTERISTICS

Round LED luminaire with a big diameter and an integrated energy-saving light source guarantees high luminous flux and even light distribution. Its body is made of white powder coated steel, and the diffuser is made of opal PMMA. It works perfectly while designing new applications as well as replacing traditional luminaires with energy-saving LED solutions. Suspension and electrical cords are not included (available as accessories).

APPLICATION

Luminaire is dedicated for indoor use. Due to good lighting of the surface and even light distribution, it is particularly well-suited to be used as the main light source in representative rooms and passageways.


CORIA 5050LM 600MM DALI I KL IP20 ZWIESZANY BIAŁY MAT 840 (50W)

DETAILED CARD

TECHNICAL PARAMETERS TABLE

Nominal power [W]:	50	Colour of the body:	white mat
Light source:	LED module	Dimensions (H/W/T/S) [mm]:	ø600/86
Colour temperature [K]:	4000	Ingress protection:	IP20
Luminous flux [lm]:	5050	DIMM DALI:	yes
Rated power of the luminaire [W]:	51	Mounting version:	suspended
Diffuser type:	OPAL	Working temperature [°C]:	from -17 to +35
Supply voltage [V]:	220-240	Net weight [kg]:	6.500
Frequency [Hz]:	50 - 60	Index:	555343
Luminous efficacy [lm/W]:	99	EAN:	5905963555343
Energy efficiency class:	E	Category type:	downlights
Electrical protection class:	I	CE certificate:	224/2023
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	ETIM class:	EC001743
Power factor:	0.97	Manual:	Download PDF
LED lifespan L70B50 [h]:	115000	Plik LDT:	Download
Diffuser material:	PS		
Material of the body:	powder coated steel		

LIGHT CURVES

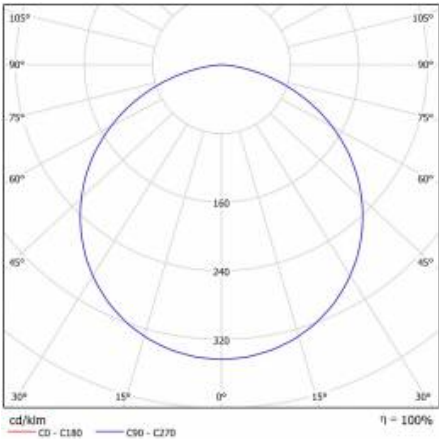

CORIA 5050LM 600MM DALI I KL IP20 ZWIESZANY BIAŁY MAT 840 (50W)

DETAILED CARD

ACCESSORIES AVAILABLE

index	Name
556647	Coria Hang set 1 fi 100 white
556661	Coria Hang set 1 fi 100 white dali
556654	Coria Hang set 1 fi 100 black
556678	Coria Hang set 1 fi 100 black dali
556685	Coria Hang set 2 fi 100 white
556708	Coria Hang set 2 fi 100 white dali
556692	Coria Hang set 2 fi 100 black
556715	Coria Hang set 2 fi 120 black dali
556722	Coria Hang set 3 fi 150 white
556746	Coria Hang set 3 fi 150 white dali
556739	Coria Hang set 3 fi 150 black
556753	Coria Hang set 3 fi 150 black dali

CORIA 5050LM 600MM DALI I KL IP20 ZWIESZANY BIAŁY MAT 840 (50W)

DETAILED CARD



Coria Hang set 1 fi 100 white (556647)



Coria Hang set 1 fi 100 white dali (556661)



Coria Hang set 1 fi 100 black (556654)



Coria Hang set 1 fi 100 black dali (556678)



Coria Hang set 2 fi 100 white (556685)




Coria Hang set 2 fi 100 white dali (556708)




Coria Hang set 2 fi 100 black (556692)




Coria Hang set 2 fi 120 black dali (556715)




Coria Hang set 3 fi 150 white (556722)



Coria Hang set 3 fi 150 white dali (556746)



Coria Hang set 3 fi 150 black (556739)



Coria Hang set 3 fi 150 black dali (556753)

Card creation date: 02 January 2025

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. * Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 224/2023

 **LENA**
LIGHTING

Lena Lighting S.A.
ul. Kórnicka 52, 63-000 Środa Wielkopolska
tel. +48 61 28 60 333 (Pn-Pt, 8-16), e-mail: hello@lenalighting.pl, www.lenalighting.pl