


Excurrence®

Connector

RJ45 Cat. 6A-STP

Product Environmental Profile

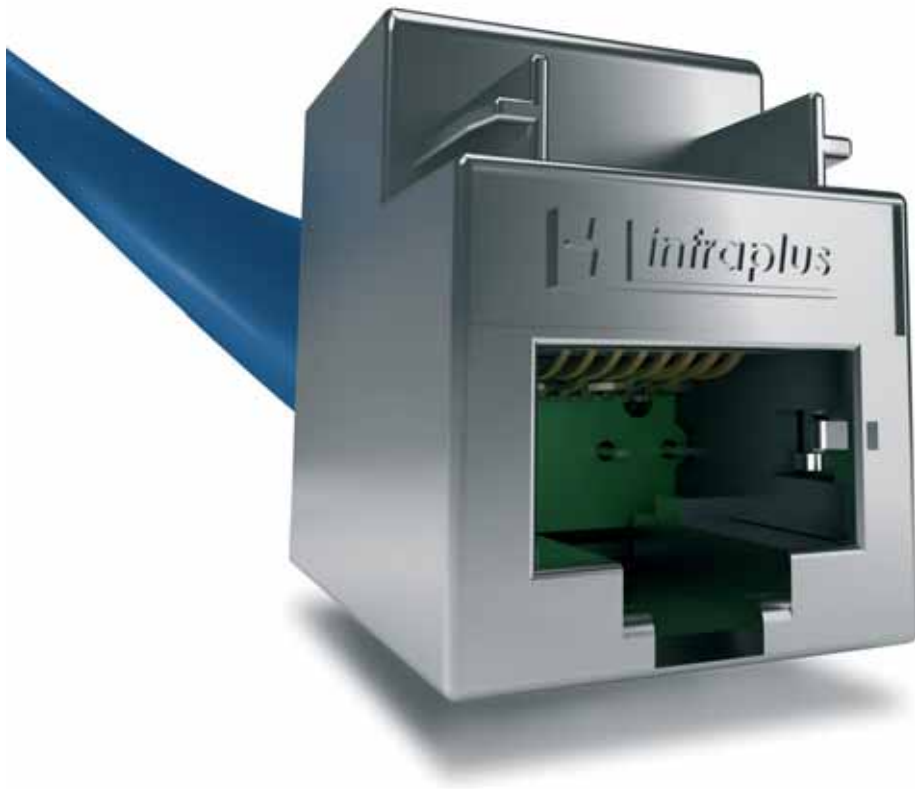

Product Environmental Profile - PEP

Product overview

The main function of the RJ45 Slim connectors product range is to provide a unique outlet for all needs in Voice, Data and Images.

This range consists of: a unique format of connector in three different levels of performances for all applications.

The representative product used for the analysis is CONNECTOR RJ45 Cat. 6A-STP commercial reference: VDI 7700SEA.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with the same technology.


The environmental analysis was performed in conformity with ISO14040 “Environmental management: Life cycle assessment – Principle and framework”.

This analysis takes the stages in the life cycle of the product into account.

Constituent materials

The mass of the range products spreads out between 12.58 g +/- 10% packing excluded. It is 12.58 g for the CONNECTOR RJ45 Cat. 6A-STP commercial reference: VDI 7700SEA.

The constituent materials are distributed as follows:

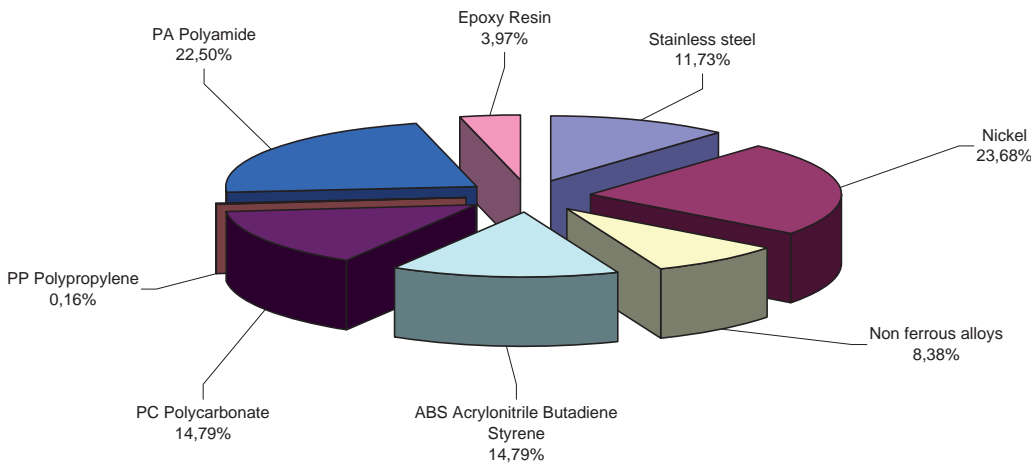

All necessary steps have been taken with our services, suppliers and subcontractors to ensure that the materials used in the composition of the RJ45 Slim connectors range do not contain any substances prohibited by the legislation that was in force* when the product or range was put on the market.

Products of this range are designed in conformity with the requirements of the ROHS directive (European Directive 2002/95/EC of 27 January 2003) and do not contain, or in the authorised proportions, lead, mercury, cadmium, chromium hexavalent, flame retardant (polybromobiphenyles PBB, polybromodiphenylthers PBDE) as mentioned in the Directive.

* according to the list available on request.

Manufacturing

RJ45 Slim connectors are manufactured at a production site which complies with the regulations governing industrial sites.

Distribution

The weight and volume of the packaging have been reduced, in compliance with the European Union's packaging directive.

The RJ45 Slim connectors packaging weight is 0.03 g. It consists of Cardboard 0.02 g and Paper 0.01 g.

The product distribution flows have been optimised by setting up local distribution centres close to the market areas.

Utilization

The products of the RJ45 Slim connectors range do not generate environmental pollution requiring special precautionary measures (noise, emissions, and so on).

The dissipated power depends on the conditions under which the product is implemented and used.

This dissipated power spreads out between 0 W and 0.001 W for the RJ45 Slim connectors product range.

For a utilisation rate of 100%, it is 0 W for the referenced CONNECTOR RJ45cat6a-STP commercial reference: VDI 7700SEA.

This thermal dissipation represents less than 0.01% of the power which passes through the product.

End of life

At end of life, the products in the RJ45 Slim connectors range can either be dismantled or grinded to facilitate the recovery of the various constituent materials.

The proportion of recyclable material is higher than 66.5%. This percentage includes the following materials: Stainless steel, Nickel, Non ferrous alloys, PP Polypropylene, PA Polyamide.

The products of this range also include ABS/PC and Epoxy resin which have to be disassembled and which must be sent to specialised treatment systems.

The end of life details appear on the product end-of-life recovery sheet.

Environmental impacts

The EIME (Environmental Impact and Management Explorer) software, version 4.0, and its database, version V10.0 were used for the life cycle assessment (LCA).

The assumed service life of the product is 20 years with a utilisation rate of the installation of 100% and the electrical power model used is OFF.

The scope of the analysis was limited to a CONNECTOR RJ45 Cat. 6A-STP - VDI 7700SEA.

The environmental impacts were analysed for the Manufacturing (M) phases, including the processing of raw materials, and for the Distribution (D) and Utilisation (U) phases.



Presentation of the environmental impacts

Environmental indicators	Short	Unit	Connector RJ45 Cat. 6A-STP, VDI 7700SEA			
			S = M + D + U	M	D	U
Raw material depletion	RMD	Y-1	5.13E ⁻¹⁶	5.23E ⁻¹⁶	1.67E ⁻¹⁹	0.00E ⁺⁰⁰
Energy depletion	ED	MJ	3.894	3.772	0.12215	0.00E ⁺⁰⁰
Water depletion	WD	dm ³	7.554	7.543	0.011651	0.00E ⁺⁰⁰
Global warming	GW	g ~CO ₂	231.17	221.58	9.584	0.00E ⁺⁰⁰
Ozone depletion	OD	g ~CFC-11	2.15E ⁻⁰⁵	1.47E ⁻⁰⁵	6.81E ⁻⁰⁶	0.00E ⁺⁰⁰
Photochemical ozone creation	POC	g ~C ₂ H ₄	0.12242	0.11419	0.008232	0.00E ⁺⁰⁰
Air acidification	AA	g ~H ⁺	0.14154	0.1403	0.001232	0.00E ⁺⁰⁰
Hazardous waste production	HWP	kg	0.001978	0.001975	3.58E ⁻⁰⁶	0.00E ⁺⁰⁰

The life cycle analysis shows that the MANUFACTURING phase (M, D or U phase) is the life cycle phase which has the greatest impact on the majority of environmental indicators. The environmental parameters of this phase have been optimized at the design stage. One subcontractor produce the connector to reduce the flow of parts.

The environmental impacts variability between the upper part and the lower part of the range is less than 5%.

Product Environmental Profile - PEP

System approach

As the product of the range are designed in accordance with the ROHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction within an assembly or an installation submitted to this Directive.

Please note that the environmental impacts of the product depend on the use and installation conditions of the product. Impacts values given above are only valid within the context specified and cannot be directly used to draw up the environmental assessment of the installation.

Glossary

Raw Material Depletion (RMD)	This indicator quantifies the consumption of raw materials during the life cycle of the product. It is expressed as the fraction of natural resources that disappear each year, with respect to all the annual reserves of this material.
Energy Depletion (ED)	This indicator gives the quantity of energy consumed, whether if be from fossil, hydroelectric, nuclear or other sources. This indicator takes into account the energy from the material produced during combustion. It is expressed in MJ.
Water Depletion (WD)	This indicator calculates the volume of water consumed, including drinking water and water from industrial sources. It is expressed in m ³ .
Global Warming Potential (GWP)	The global warming of the planet is the result of the increase in the greenhouse effect due to the sunlight reflected by the earth's surface being absorbed by certain gases known as "greenhouse-effect" gases. This effect is quantified in gram equivalent CO ₂ .
Ozone Depletion (OD)	This indicator defines the contribution to the phenomenon of the disappearance of the stratospheric ozone layer due to the emission of certain specific gases. This effect is expressed in gram equivalent of CFC-11.
Photochemical Ozone Creation (POC)	This indicator quantifies the contribution to the smog phenomenon (the photochemical oxidation of certain gases which generates ozone) and is expressed in gram equivalent of ethylene (C ₂ H ₄).
Air Acidification (AA)	The acid substances present in the atmosphere are carried by the rain. A high level of acidity in rain can cause damage to forests. The contribution of acidification is calculated using the acidification potentials of the substances concerned and is expressed in mole equivalent of H ⁺ .
Hazardous Waste Production (HWP)	This indicator gives the quantity of waste, produced along the life cycle of the product (manufacturing, distribution, use, including production of energy), that requires special treatments. It is expressed in kg.



We are committed to safeguarding our planet by "Combining innovation and continuous improvement to meet the new environmental challenges".