



TOLEDO FLAT+ round

672727.002.07 |

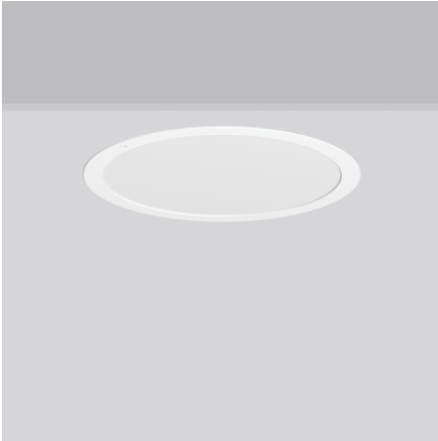

Recessed downlights
4051859994237
D 390, H 2

Recessed ceiling mounting
white

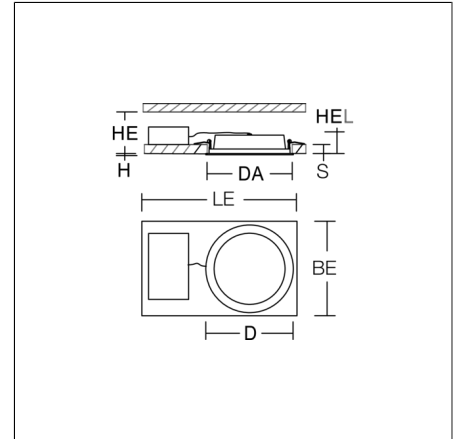

Flexible round recessed multifunction downlight. Luminaire for escape route illumination. Housing: sheet steel, powder-coated. Luminaire frame: aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. LED backlight technology for homogeneous illumination of the entire light-emitting surface. Ceiling installation with spring system. Including separate LED converter with connecting cable 250 mm.

TOLEDO FLAT+ round

672727.002.07 |



Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Diameter D	390 mm
Height H	2 mm
Cut-out diameter DA	377 mm
Installation space height HE	60 mm
Luminaire: recess height HEL	40 mm
Ceiling thickness S	1-20 mm
Weight	1.65 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	1550 lm 2050 lm 2550 lm 2950 lm
System power, mains operation	15 W 18 W 22 W 25 W
Rated luminous flux, emergency operation	430 lm
System efficiency	103 lm/W 114 lm/W 116 lm/W 118 lm/W
Glare evaluation UGR (4H 8H)	22,4 23,4 24,2 24,7
Beam angle	113°
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	35
Luminaires on B16A fuse	56
Luminaires on C10A fuse	40
Luminaires on C16A fuse	64
Inrush current / Inrush current duration	14 A / 166 µs
CIE Flux Code / CEN Flux Code	47 79 96 100 100
Type of protection	IP 54 on room side IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 35 °C
Ambient temperature for non-maintained power mode	5 °C ... + 35 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC