


# MINGATA mini

612171.004.76 | Pole luminaires



Outdoor luminaires and pole top luminaires  
4051859366164  
L 530, B 270, H 100

Pole mounting  
silver, matt (approx. RAL 9006)

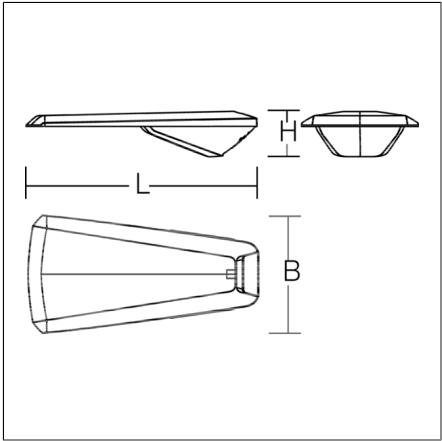

Functional pole-side and pole-top luminaire in a modern design. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. Pole-top fixing with integrated cable routing and stainless steel screws. With membrane valve as a standard to avoid condensed water. Cover clear single-pane toughened glass. Asymmetrical light distribution. Luminaires for pole top Ø 76 mm (with optional adapter sleeve, also suitable for pole top Ø 60 mm). Tool-free maintenance / replacement by Eccentric-Lock system with disconnect plug and Hybrid-Lock-System. 4 x 1.0 mm² connecting cable included, length 8 m.

### Product specifications

|                                              |                            |
|----------------------------------------------|----------------------------|
| Length L                                     | 530 mm                     |
| Width B                                      | 270 mm                     |
| Height H                                     | 100 mm                     |
| Weight                                       | 5.4 kg                     |
| Light source                                 | LED                        |
| Colour temperature                           | 3000 K                     |
| Rated luminous flux                          | 2000 lm                    |
| System power                                 | 15 W                       |
| System efficiency                            | 133 lm/W                   |
| Glare evaluation UGR (4H 8H)                 | 33,7                       |
| Beam angle                                   | 76°/48°/76°/2°             |
| Rated life                                   | 100000 h (L80/B50)         |
| Colour rendering index (CRI)                 | 70                         |
| Colour tolerance                             | 3                          |
| Photobiological safety according to EN 62471 | Risk group 1               |
| Driver                                       | Converter, dimmable        |
| Control                                      | DALI                       |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 18                         |
| Luminaires on B16A fuse                      | 28                         |
| Inrush current / Inrush current duration     | 26 A / 180 µs              |
| CIE Flux Code / CEN Flux Code                | 41 77 98 100 100           |
| Type of protection                           | IP 66                      |
| Protection class                             | II                         |
| Filament test                                | 960 °C                     |
| Impact resistance                            | IK08                       |
| Ambient temperature                          | -20 °C ... + 50 °C         |
| Conformity mark                              | CE, EAC                    |

### Accessories



982562.000  
Reducing adapter Ø 60 mm



982588.000  
Pole bracket for 2 luminaires, uncoated

# MINGATA mini

612171.004.76 | Pole luminaires



982589.000  
Pole bracket for 3 luminaires, uncoated



982591.000  
Wall bracket, uncoated



982591.004  
Wall bracket, powder-coated



982590.000  
Pole bracket for 4 luminaires, uncoated



61199.009  
Fuse box