

Cesar Jazz

THORN

96701343 CESAR JAZZ 2W U/D 1L 930NWB RD ANT

LED 18W CESA_JAZZ_930_UD	IP65	IK10		CE	
--------------------------	------	------	---	----	--


Cesar Jazz

Cesar Jazz a wall mounted, architectural LED luminaire for decorative facade lighting, 2 window, narrow beam up and wide beam down distribution. Fixed output Remote LED driver. Class II electrical, IP65, Impact strength: IK10. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø180 x 180 mm
Luminaire input power: 18.1 W
Luminaire luminous flux: 356 lm
Luminaire efficacy: 20 lm/W
Weight: 3.36 kg



TLG_CESA_F_JAZZ_ANT.jpg

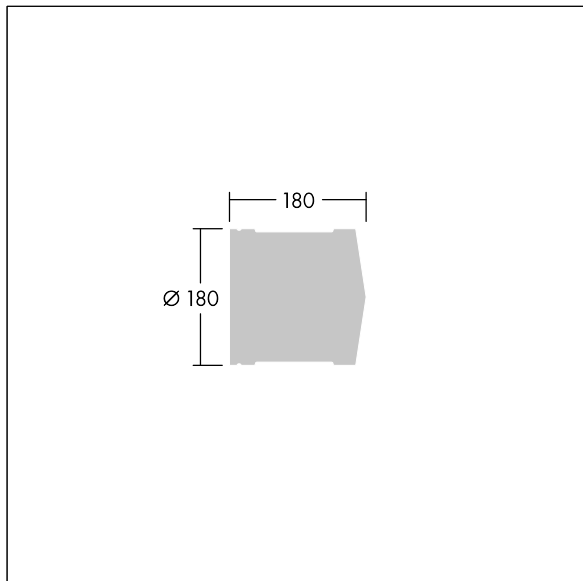

TLG_CESA_M_JAZZ_M_3UD.wmf

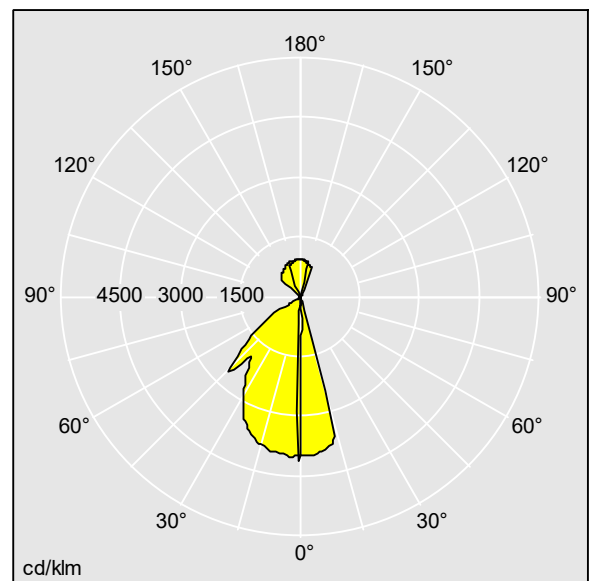

96701343.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 356 lm
Luminaire efficacy*: 20 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 18.1 W
Dimming: FIX
LOR: 1,00 ULOR: 0,65 DLOR: 0,34

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting