

Axyl Greet B

THORN


96700692 AXYL GREETB H580 DE 56L 930 A/S HFX ANT

LED 36W AXYL_GB_DE_930	IP65	IK06			
------------------------	------	------	---	---	--


Axyl Greet B

AXYL Greet B, a free-standing, decorative LED bollard with asymmetrical distribution. Class II electrical.. DALI-2 dimmable LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 130 x 290 x 580 mm
 Luminaire input power: 35.6 W
 Luminaire luminous flux: 1754 lm
 Luminaire efficacy: 49 lm/W
 Weight: 6.68 kg

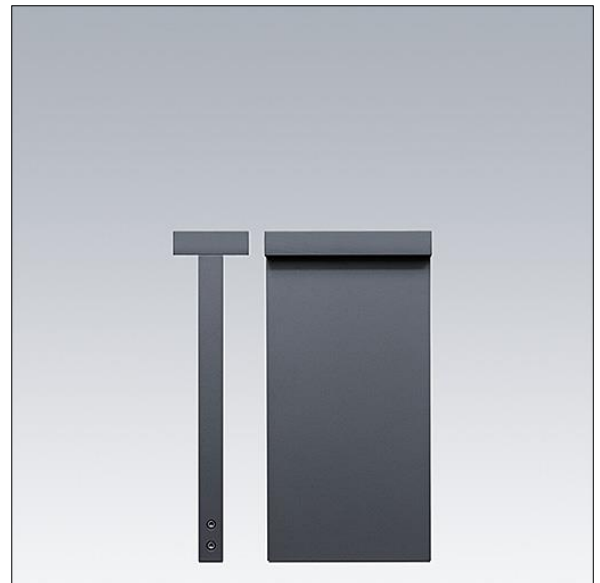

TLG_AXYL_F_GREET_B_M_DE_ANT.jpg

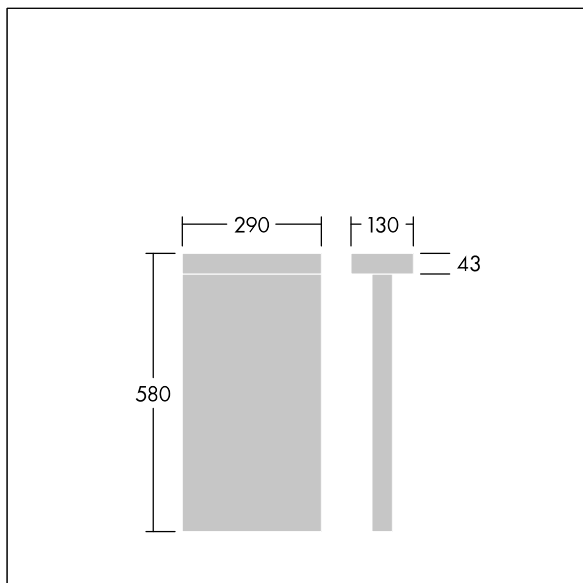

TLG_AXYL_M_GREET_B_M_DE.wmf

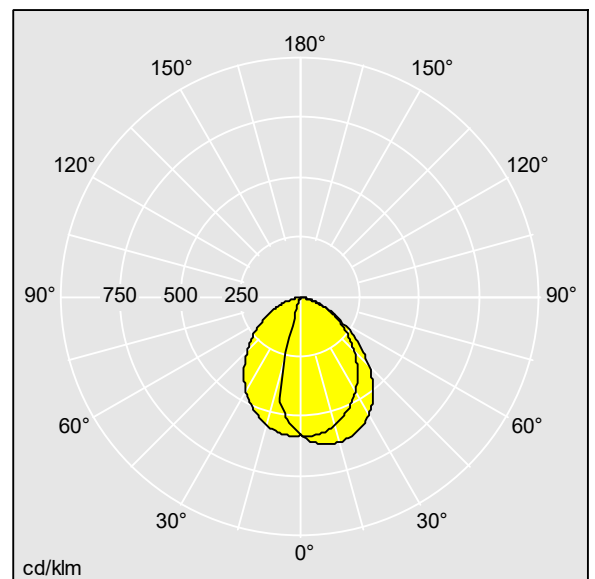

96700692.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 1754 lm
 Luminaire efficacy*: 49 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 35.6 W Power factor = 0.95
 Dimming: Dali2Dim
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting