

Axyl Gild

THORN

96700483 AXYL GILD L 2W 28L 930 UWB HF ANT

LED 16W AXYL_GILD2L_UWB930	IP65	IK06		
----------------------------	------	------	---	---


Axyl Gild

Axyl Gild, a wall mounted, architectural LED luminaire for decorative facade lighting, 2 window with Ultra wide beam distribution. Class I electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED..


Dimensions: 265 x 100 x 110 mm
Luminaire input power: 16 W
Luminaire luminous flux: 1517 lm
Luminaire efficacy: 95 lm/W
Weight: 2.36 kg



TLG_AXYL_F_GILD_ANT.jpg

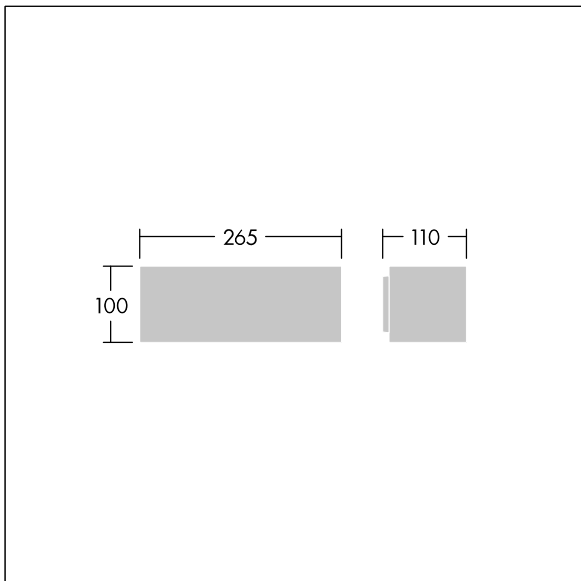

TLG_AXYL_M_GILD_L.wmf

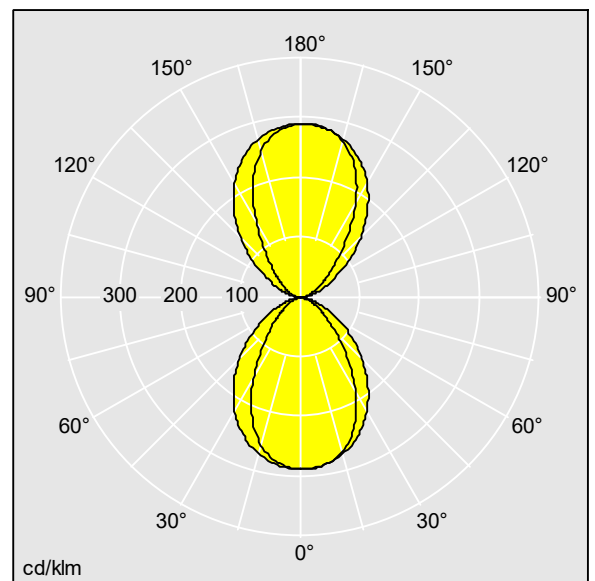

96700483.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1517 lm
Luminaire efficacy*: 95 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 16 W Power factor = 0.86
Dimming: FIX
LOR: 1,00 ULOR: 0,49 DLOR: 0,51

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting