


MEGA TOWER F

621097.0031.1 | Wall luminaires



Wall luminaires
4051859511205
L 160, B 115, H 303

Wall (surface)
anthracite metallic (DB703)

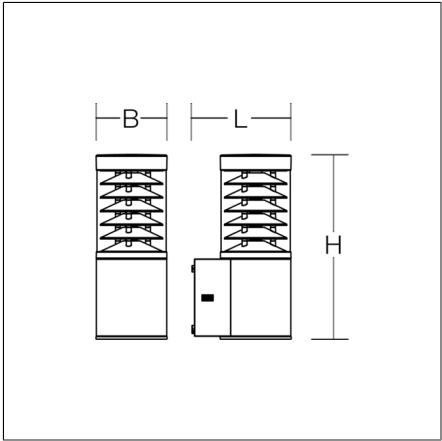

Attractive wall luminaire with innovative housing design and high-quality LED optics. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Luminaire head made of corrosion-resistant pressure die-cast aluminium, powder-coated, with transparent cylinder (glass) and translucent anti-glare louvres. Fixing on the wall outside the sealed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravalock® System.

Product specifications


Length L	160 mm
Width B	115 mm
Height H	303 mm
Weight	3 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	620 lm
System power	10 W
System efficiency	62 lm/W
Glare evaluation UGR (4H 8H)	23,8
Beam angle	down 180° up 180°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	39
Luminaires on B16A fuse	63
Luminaires on C10A fuse	63
Luminaires on C16A fuse	100
Inrush current / Inrush current duration	8 A / 5 µs
CIE Flux Code / CEN Flux Code	7 31 69 64 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK04
Ambient temperature	-20 °C ... + 45 °C
Conformity mark	CE, EAC

MEGA TOWER F

621097.0031.1 | Wall luminaires



Spareparts



982260.0031
Luminaire head, anthracite