


LEVIDO SWING round

901835.003.1.76 | Recessed projectors



Recessed projectors
4051859945017
D 91, H 2

Recessed ceiling mounting
deep black, matt (RAL 9005)

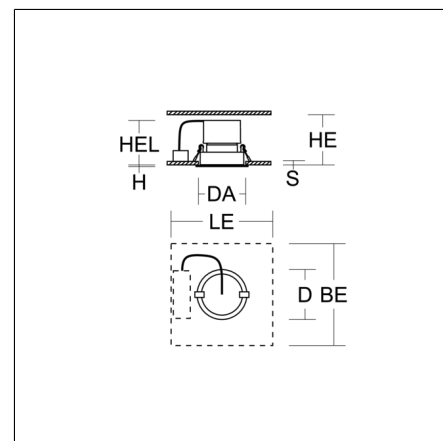

Round recessed projector with very small dimensions. Die-cast aluminium cover, powder-coated. Extruded aluminium heat sink. Reflector: aluminium, highly polished anodised finish. With safety glass. Can be swivelled by $\pm 25^\circ$. Medium beam light distribution. Light beam 23° . MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. Suitable for Recessed ceiling mounting. Luminaire mounting with spring system. Including separate LED converter with connecting cable 250 mm. Suitable for through-wiring. Opal diffuser (PMMA) for uniform, homogenous light distribution available as an accessory.

Product specifications

Diameter D	91 mm
Height H	2 mm
Cut-out diameter DA	78 mm
Luminaire: recess height HEL	80 mm
Ceiling thickness S	1-20 mm
Installation space length LE	200 mm
Installation space width BE	200 mm
Installation space height HE	80 mm
Weight	410 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux	670 lm 1050 lm
System power	7.5 W 12 W
System efficiency	88 lm/W 89 lm/W
Glare evaluation UGR (4H 8H)	23,5 25,1
Beam angle	23°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	66
Luminaires on B16A fuse	106
Luminaires on C10A fuse	66
Luminaires on C16A fuse	106
Inrush current / Inrush current duration	4.24 A / 41 μ s
CIE Flux Code / CEN Flux Code	91 96 99 100 100
Type of protection	IP 40 on room side IP 20
Protection class	II
Filament test	850 $^\circ$ C
Impact resistance	IK06
Ambient temperature	5 $^\circ$ C ... + 35 $^\circ$ C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC

LEVIDO SWING round

901835.003.1.76 | Recessed projectors



Accessories



982184.002
Cover: plastic, opal.