


# MEGA CONE

612163.0031 | Bollards



Bollards  
4051859346647  
D 115, H 1035

free-standing  
anthracite metallic (DB703)

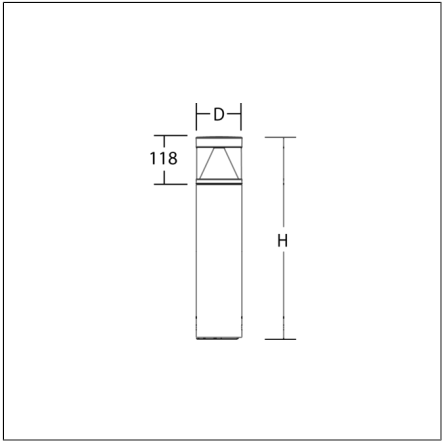

Attractive cylindrical bollard with innovative housing design and high-quality LED optics. Luminaire tube Ø 115 mm made of corrosion-resistant aluminium profile, powder coated. Recessed stainless steel fixing plate. Non-corrosive gear compartment made of mould-cast dual compound thermoplastic with integral TP gasket. With membrane valve as a standard to avoid condensed water. Seawater resistant coating. Luminaire head made of corrosion-resistant pressure die-cast aluminium, powder-coated, with clear glass cylinder and conical reflector. The robust stainless steel mounting base ensures long-term stability. Elongated holes in the base for subsequent and simple alignment of the luminaire. Driver integrated. Connection box on base, max. 2 x 3 x 2.5 mm² for through wiring.

### Product specifications

Diameter D	115 mm
Height H	1035 mm
Weight	5.34 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	770 lm
System power	10 W
System efficiency	77 lm/W
Glare evaluation UGR (4H 8H)	23,4
Beam angle	down 142° up 180°
Rated life	60000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	39
Luminaires on B16A fuse	63
Luminaires on C10A fuse	63
Luminaires on C16A fuse	100
Inrush current / Inrush current duration	8 A / 5 µs
CIE Flux Code / CEN Flux Code	22 63 90 77 100
Type of protection	IP 65
Protection class	I
Impact resistance	IK05
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

# MEGA CONE

612163.0031 | Bollards



## Accessories



982103.000  
Accessory for ground installation

## Spareparts



982527.0031  
Luminaire head, anthracite