


FLAT POLYMERO

311945.002.4.191 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859368496
D 360, H 100

Ceiling mounting, Wall (surface)
white

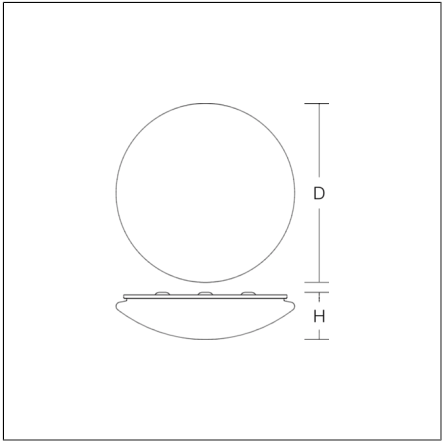

Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface). Slave luminaire. Can only be operated in combination with corresponding master luminaire.

Product specifications

Diameter D	360 mm
Height H	100 mm
Weight	1.26 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1200 lm
System power	12 W
System efficiency	100 lm/W
Glare evaluation UGR (4H 8H)	18,6
Beam angle	down 115° up 180°
Rated life	50000 h (L70/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	135
Luminaires on B16A fuse	217
Luminaires on C10A fuse	135
Luminaires on C16A fuse	217
Inrush current / Inrush current duration	0.1 A / 10000 µs
CIE Flux Code / CEN Flux Code	43 73 91 89 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



08-311161.032
Replacement diffuser