



# LESS IS MORE 27

## 312198.003.1 | Linear systems

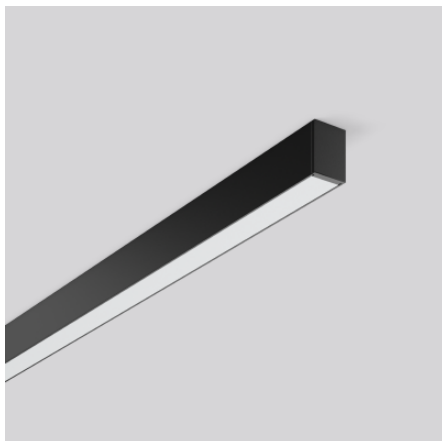

Ceiling and wall luminaires  
4051859273714  
L 1212, B 28, H 38

Ceiling mounting, Wall (surface)  
deep black, matt (RAL 9005)

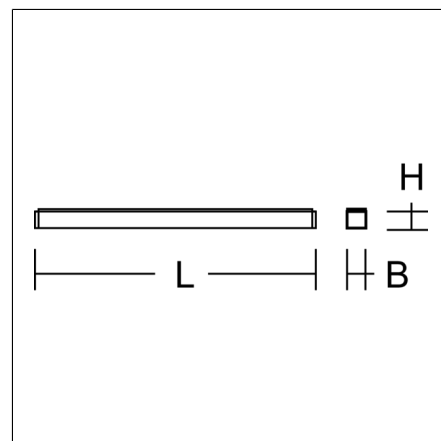

Ceiling and wall luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Dif-fuser made of non-yellowing plastic (PMMA), opal. Suitable for Ceiling mounting, Wall (surface). External driver with connecting cable.

### Product specifications

Length L	1212 mm
Width B	28 mm
Height H	38 mm
Weight	1.16 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1900 lm
System power	31 W
System efficiency	61 lm/W
Glare evaluation UGR (4H 8H)	27,5
Beam angle	110°/109°
Rated life	60000 h (L80/B10)
Colour rendering index (CRI)	82
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	22
Luminaires on C16A fuse	35
Inrush current / Inrush current duration	21 A / 275 µs
CIE Flux Code / CEN Flux Code	48 79 96 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK00
Ambient temperature	-25 °C ... + 25 °C
Conformity mark	CE, EAC