




Recessed ceiling luminaires  
4051859688327  
L 424, B 55, H 190

Recessed ceiling mounting  
black

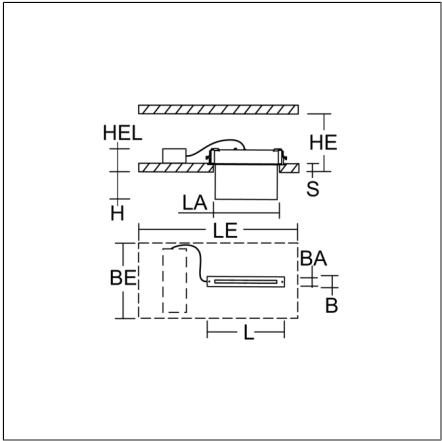

Luminaire for escape route identification. Installation housing sheet steel. Ceiling plate stainless steel high polish or powder-coated. Display panel: highly transparent panel, plastic, with legend on one side/both sides. Driver integrated. Suitable for connection to central battery systems. Please indicate legend number when placing your order!

Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	424 mm
Width B	55 mm
Height H	190 mm
Cut-out length LA	410 mm
Cut-out width BA	42 mm
Installation space height HE	90 mm
Ceiling thickness S	1-30 mm
Weight	2.14 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	4,8 W
System power, emergency operation	4,8 W
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

# HALYXX

671740.003.1 | Luminaires for escape route identification



## Accessories



981687.000  
Concrete box