


Product End of Life Instructions

ATV340 22kW 3PH 400V

ATV340 – 11kW - 15kW - 18.5kW - 22kW 3PH 400V



 Potential disassembly risks




DANGER


**ELECTRIC SHOCK,
EXPLOSION,
OR ARC FLASH.**

To service, remove all power.
- Wait 15 minutes
- Verify no voltage is present.

**Failure to comply
will result in death
or serious injury**

 End of Life Instructions

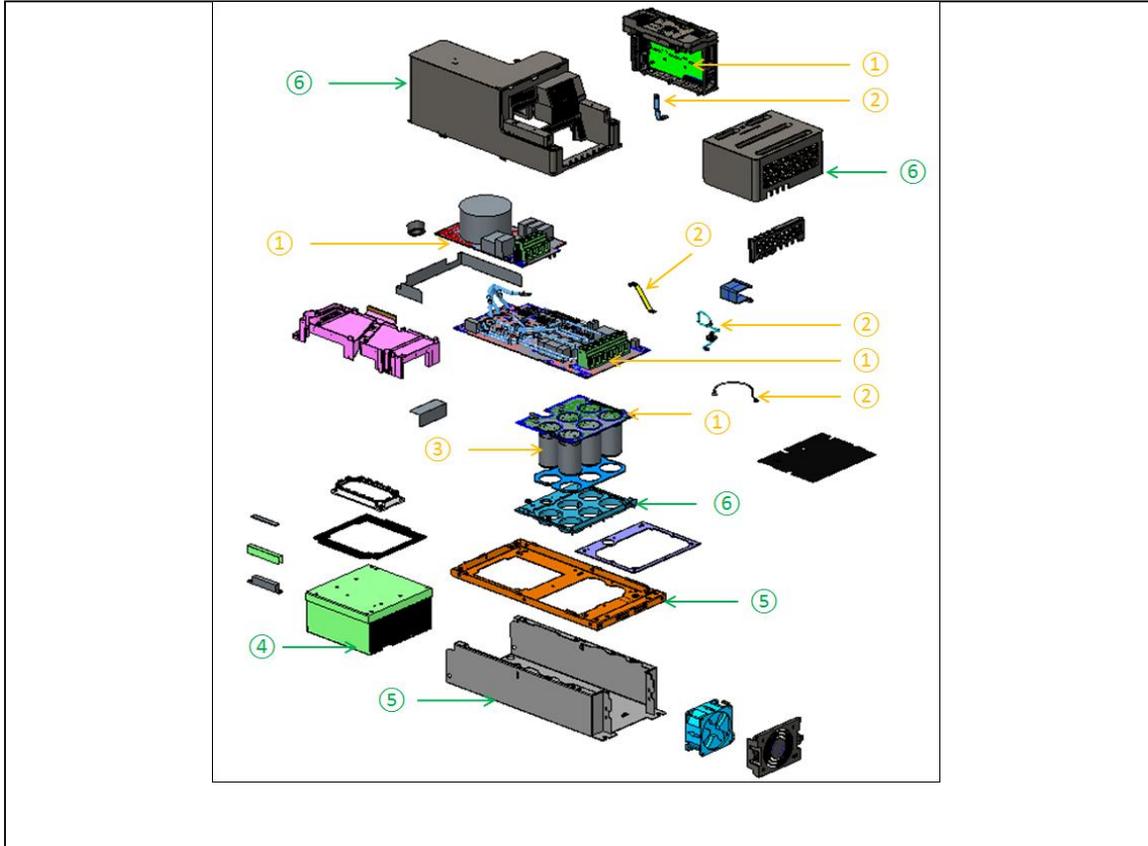

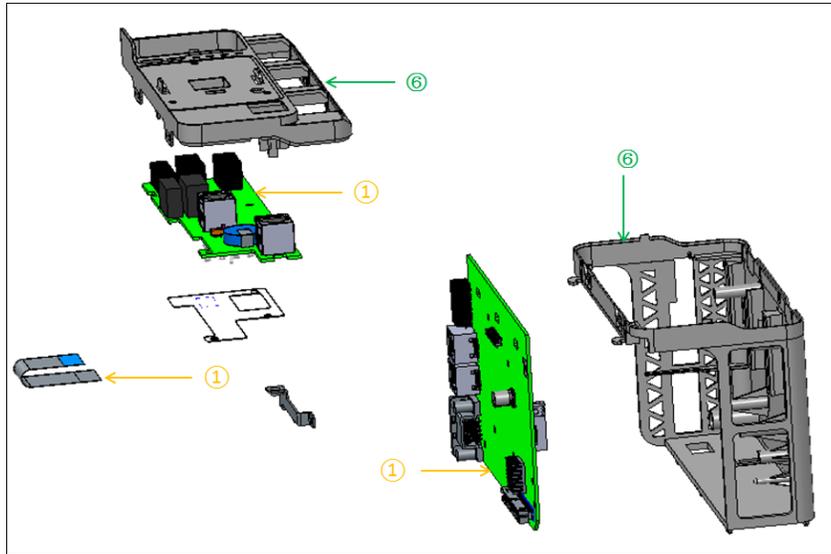

| Recommendation | Number on drawing | Component / Material | Weight (in g) | Comment |
|------------------|-------------------|---|---------------|-----------------------|
| To be depolluted | ① | Electronic Board (Communication) > | 2582,2 | PCBA |
| To be depolluted | ② | Cable (high current) | 121,9 | |
| To be depolluted | ③ | Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume | 955,8 | Electrolyte Capacitor |
| To be dismantled | ④ | Aluminium | 2848,4 | Heatsink |
| To be dismantled | ⑤ | Steel | 2285,2 | |
| To be dismantled | ⑥ | PC FR | 1161,6 | Housing and cover |

Product description

| | |
|---------------------------------------|---|
| Manufacturer identification | Schneider Electric Industries SAS |
| Brand name | Schneider Electric |
| Product function | The main function of ATV340 is the speed control and torque of a three phase motors (Asynchronous and Permanent Magnet motors) in energy management for machines application. |
| Product reference | ATV340D22N4 |
| Additional similar product references | ATV340D22N4 ATV340D18N4 ATV340D15N4 ATV340D11N4 ATV340D22N4E ATV340D18N4E ATV340D15N4E ATV340D11N4E |
| Total representative product mass | 10358 g |
| Representative product dimensions | 385mm x 180mm x 249mm |
| Accessories | No |
| Date of information release | 09/2016 |

Additional information

| | | |
|---|--|---|
| Legal information | This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product. | |
| In case of special transportation: transportation method | 0 | |
| Recyclability potential | 64% | Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVEOLI1609006

© 2016 - Schneider Electric – All rights reserved

09/2016