


FLAT POLYMERO IP44

221153.002.191 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859182948
D 305, H 115

Ceiling mounting, Wall (surface)
white

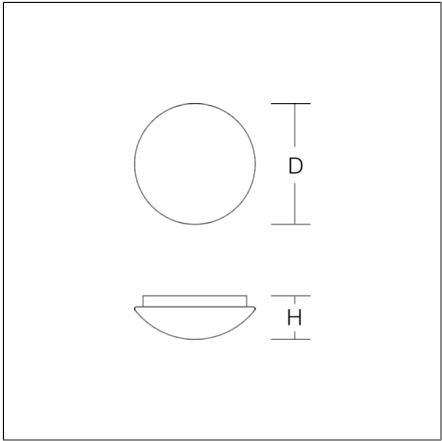

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: plastic. Diffuser made of plastic (polycarbonate), opal, shock-proof. Diffuser fastening: spring system. Suitable for Ceiling mounting, Wall (surface). Slave luminaire. Can only be operated in combination with corresponding master luminaire. IP 43 ceiling mounting, IP 44 wall mounting.

Product specifications


Diameter D	305 mm
Height H	115 mm
Weight	1.45 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1350 lm
System power	13 W
System efficiency	104 lm/W
Glare evaluation UGR (4H 8H)	20,7
Beam angle	down 119° up 180°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Not necessary
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	132
Luminaires on B16A fuse	212
Luminaires on C10A fuse	132
Luminaires on C16A fuse	212
Inrush current / Inrush current duration	0.1 A / 10000 µs
CIE Flux Code / CEN Flux Code	41 70 89 89 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO IP44

221153.002.191 | Ceiling and wall luminaires



Spareparts



08-5145.032
Replacement diffuser