



BR/R LED

PILA LED 25W B35 E14 WW FR ND 1CT/10

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

Product data


General Information	
Cap-Base	E14 [E14]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	30000X
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	250 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	83.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	3 W
Lamp Current (Nom)	27 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.4 s
Warm Up Time to 60% Light (Nom)	0.4 s

Power Factor (Nom)	0.47
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	54 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	B35 [B 35mm]
Approval and Application	
Energy Efficiency Label (EEL)	G
Energy Consumption kWh/1000 h	3 kWh
Product Data	
Full product code	872790097038800
Order product name	PILA LED 25W B35 E14 WW FR ND 1CT/10
EAN/UPC - Product	8727900970388
Order code	929002966831
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

BR/R LED

Material Nr. (12NC)	929002966831
Net Weight (Piece)	24.000 g


Dimensional drawing




Candle B35 2.8-25W 250lm 2700K E14 ND FR

Product	D	C
PILA LED 25W B35 E14 WW FR ND 1CT/10	35 mm	106 mm


Photometric data



LEDcandle CorePro B35 2,8W E14 827 FR-LDD

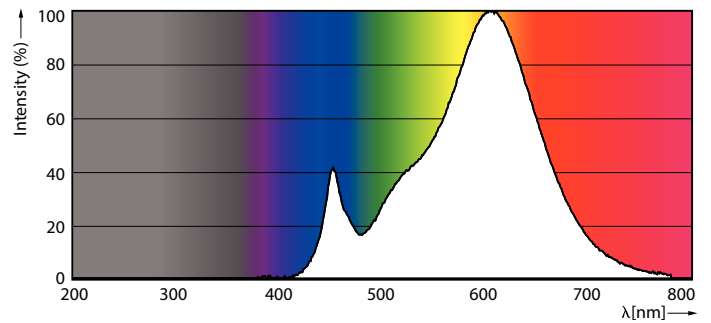

LEDcandle CorePro 2,8W B35 E14 827 FR-POC



LEDcandle CorePro 2,8W B35 E14 827-GUL

BR/R LED

Lifetime



15K LED

15K LMP

