


CENTRYXX IP40

672582.003 | Stand-by luminaires for escape route illumination



Ceiling luminaires
4051859869245
L 150, B 150, H 30

Ceiling mounting
black

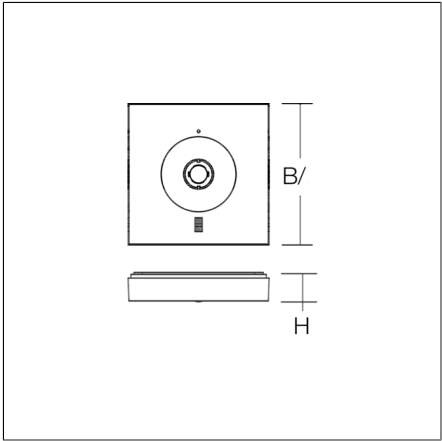

Flat, square surface-mounted luminaire. For escape route illumination. Housing: plastic (polycarbonate). Cover: polycarbonate. Plastic lenses for area lighting and escape route illumination included in scope of delivery. Lenses can be replaced without tools. Electronic ballast included. Self-contained system with automatic self-test.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	3 h, 8 h
Operating mode	non-maintained power mode
Length L	150 mm
Width B	150 mm
Height H	30 mm
Weight	368 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux, emergency operation	3 h: 240 lm 8 h: 120 lm
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast in emergency mode only
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Type of protection	IP 40
Protection class	II
Ambient temperature for non-maintained power mode	0 °C ... + 25 °C
Conformity mark	CE

Accessories



982949.003
Mounting set for through wiring surface installation



982792.002
Optic lenses



983086.000
Asymmetrical lens for areas to be highlighted



983172.000
Square area lens for anti-panic lighting

982341.003.1

CENTRYXX IP40

672582.003 | Stand-by luminaires for escape route illumination



Mounting kit for chains/cable suspensions