


FLAT BASIC

211355.002.3.19 | Ceiling and wall luminaires



Ceiling and wall luminaires
4010319928366
D 420, H 124

Ceiling mounting, Wall (surface)
white

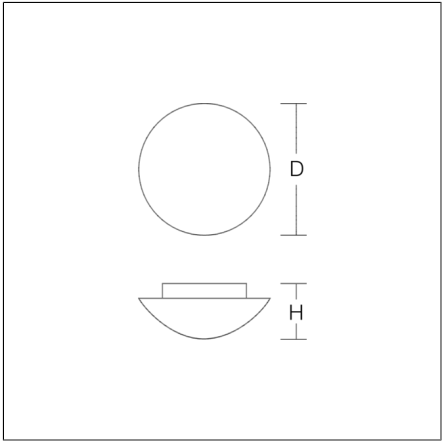

Decorative round surface-mounted luminaire. Base: plastic. Triplex glass produces particularly homogeneous, soft and glare free lighting. Suitable for Ceiling mounting, Wall (surface). With integrated HF movement sensor. Functional parameters of the motion detector (ceiling mounting up to 4.0 m or wall mounting up to 2.7 m): HF detector 5.8 GHz ISM frequency band. Sensitivity/Range: 1-8 m in diameter, adjustable from 20-100%. Time control between 10 seconds and 30 minutes, adjustable. Coverage: 120°. Can be used as master luminaire up to 800 W (ohmic load), 500 W (fluorescent lamp, LED) / 400 A, 200 µs. Suitable for outdoor use to a limited extent only, as it is sensitive to all movements.

Product specifications

| | |
|-------------------------------|---|
| Diameter D | 420 mm |
| Height H | 124 mm |
| Weight | 2.93 kg |
| Light source | 1 x A60 max. 60 W, E27 |
| Rated luminous flux | 490 lm |
| System power | 46 W |
| System efficiency | 11 lm/W |
| Glare evaluation UGR (4H 8H) | 15,1 |
| Beam angle | down 119° up 180° |
| Driver | Not necessary |
| Control | on/off |
| Voltage | 0 - 250 V / 0 - 60 Hz |
| CIE Flux Code / CEN Flux Code | 41 70 89 76 71 |
| Type of protection | IP 43 ceiling mounting IP 44 wall mounting |
| Protection class | I |
| Filament test | 960°C - 30 seconds |
| Impact resistance | IK02 |
| Ambient temperature | 25 °C |
| Conformity mark | CE, EAC |

Spareparts



05-211011.002
Replacement glass