


# ALU-LUX OVAL

582063.0031 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859353478  
L 258, B 148, H 95

Ceiling mounting, Wall (surface)  
anthracite metallic (DB703)

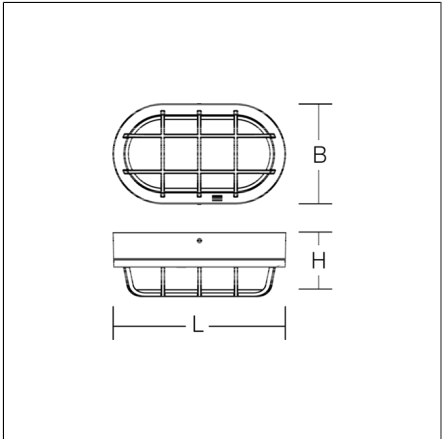

Decorative surface-mounted luminaire for outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve to avoid condensation. Crystal glass: matt inside. Shadow-free, homogeneous and soft illumination. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Separate connection compartment for direct connection of rigid cables up to 3 x 2.5 mm². Replaceable LED module.

## Product specifications

Length L	258 mm
Width B	148 mm
Height H	95 mm
Weight	1.5 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	480 lm
System power	8 W
System efficiency	60 lm/W
Glare evaluation UGR (4H 8H)	22
Beam angle	down 135°/120° up 180°/180°
Rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	230 V / 50 Hz
CIE Flux Code / CEN Flux Code	39 68 88 88 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-20 °C ... + 30 °C
Conformity mark	CE, EAC

## Spareparts



982586.009  
Replacement gasket

982587.002  
Replacement glass