

Axyl Etch

THORN


96700584 AXYL ETCH M WF 1L 830 EB HF ANT

LED 5W AXYL_ETCH_830	IP65	IK10	⊕	CE	
----------------------	------	------	---	----	--


Axyl Etch

Axyl Etch, a wall mounted, architectural LED luminaire for decorative facade lighting, with elliptical beam distribution. Class I electrical.. Fixed output LED driver. , IP65, Impact strength: IK10. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: - 20°C to +40°C. Complete with 3000K LED..


Dimensions: 150 x 40 x 90 mm
Luminaire input power: 4.7 W
Luminaire luminous flux: 181 lm
Luminaire efficacy: 38 lm/W
Weight: 0.73 kg

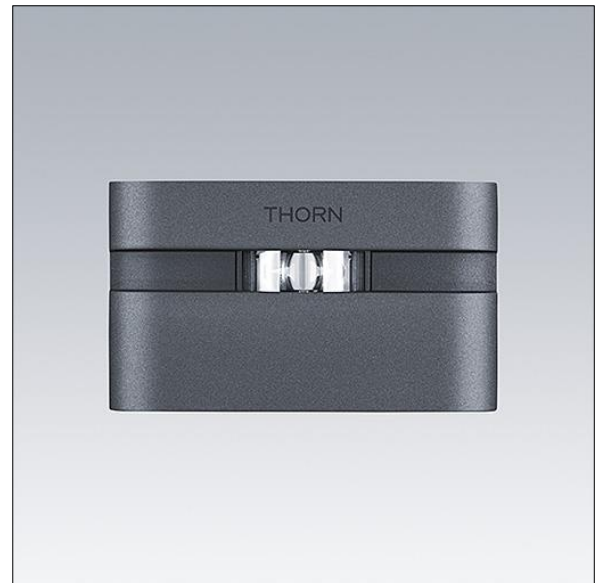

TLG_AXYL_F_ETCH_ANT.jpg

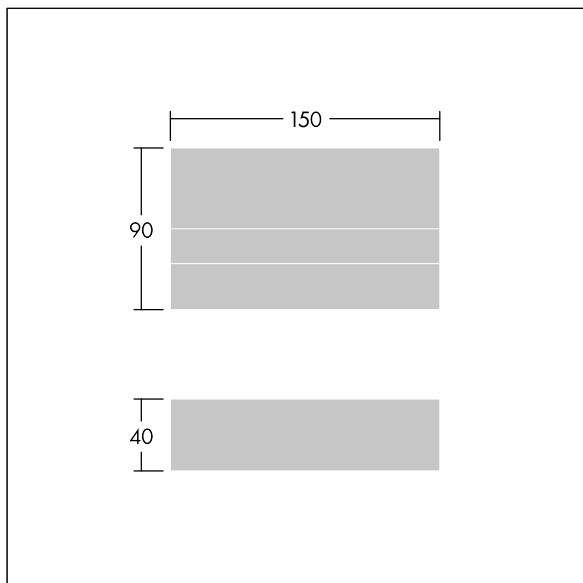

TLG_AXYL_M_ETCH.wmf

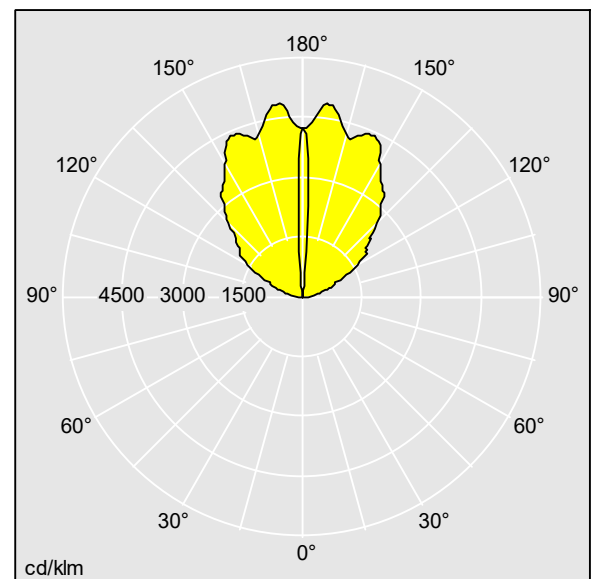

96700584.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 181 lm
Luminaire efficacy*: 38 lm/W
Colour Rendering Index min.: 80
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 4.7 W Power factor = 0.6
Dimming: FIX
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class G.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting