


Pendant luminaires  
4051859954071  
L 1411, B 110, H 88

pendant  
traffic white, matt (RAL 9016)

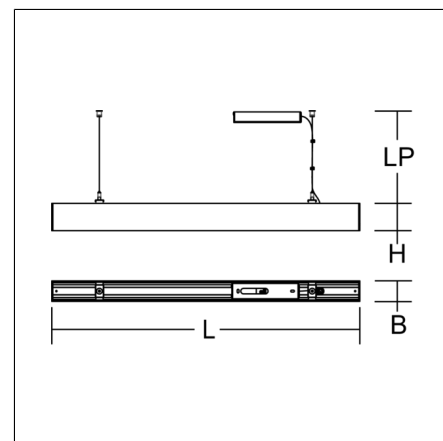

Linear pendant luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated, without visible screws. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA) micro-prismatic. Specially matched 2-component optical system for glare-free light at the workstation (suitable for use in environments with computer screens in accordance with EN 12464-1). Direct light emission. Suitable for pendant. 2-point steel cable suspension freely positionable and infinitely height-adjustable. Special lengths available on request. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring.

## Product specifications

Length L	1411 mm
Width B	110 mm
Height H	88 mm
Suspension length LP	2000 mm
Weight	5.985 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2700 lm
System power	21 W
System efficiency	129 lm/W
Glare evaluation UGR (4H 8H)	18
Beam angle	80°/82°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	26
Luminaires on C10A fuse	27
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	26 A / 140 µs
CIE Flux Code / CEN Flux Code	67 91 99 99 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE