


GSUN 5

672534.002.89 | Stand-by luminaires for escape route illumination



Ceiling and wall luminaires
4051859723448
L 336, B 56, H 75

Ceiling mounting, Suspension cable/chain,
Wall (surface)
white

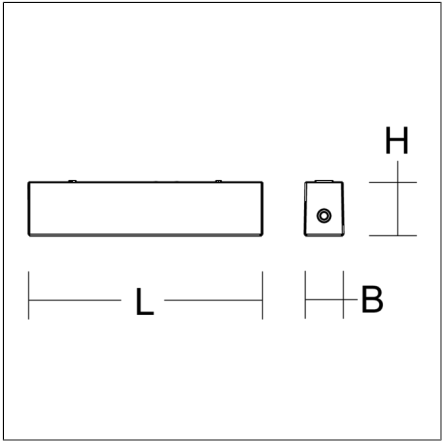

Rectangular surface-mounted luminaire in classic design. For escape route illumination. Housing: shockproof plastic (polycarbonate). Lens, plastic, for ideal light distribution on escape route. Suitable for Ceiling mounting, Suspension cable/chain, Wall (surface). Large cable entry space. Suitable for through-wiring. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXIFAIR central battery units. Suspension set as accessory.

Product specifications

| | |
|---|--------------------------------|
| Typ of emergency lighting | Central battery system |
| Monitoring | Luxifair AC-Control |
| Battery | without |
| Operating mode | non-maintained power mode |
| Length L | 336 mm |
| Width B | 56 mm |
| Height H | 75 mm |
| Weight | 0.95 kg |
| Light source | LED |
| Colour temperature | 4000 K |
| Rated luminous flux, mains operation | 710 lm |
| System power, mains operation | 6,7 W |
| Rated luminous flux, emergency operation | 710 lm |
| System power, emergency operation | 6,7 W |
| System efficiency | 106 lm/W |
| Glare evaluation UGR (4H 8H) | 21,1 |
| Beam angle | 131°/100° |
| Colour rendering index (CRI) | 80 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Electronic ballast |
| Control | on/off |
| Voltage | 220 - 240 V / 0 Hz, 50 - 60 Hz |
| Luminaires on B10A fuse | 17 |
| Luminaires on B16A fuse | 27 |
| Luminaires on C10A fuse | 28 |
| Luminaires on C16A fuse | 45 |
| Inrush current / Inrush current duration | 27 A / 250 µs |
| CIE Flux Code / CEN Flux Code | 42 77 96 100 100 |
| Type of protection | IP 54 |
| Protection class | II |
| Filament test | 850°C - 30 seconds |
| Impact resistance | IK06 |
| Ambient temperature for maintained power | -10 °C ... + 45 °C |
| Ambient temperature for non-maintained power mode | -10 °C ... + 45 °C |
| Safety marks | D-mark |
| Conformity mark | CE |

GSUN 5

672534.002.89 | Stand-by luminaires for escape route illumination



Accessories



982763.000
Suspension cable set