

Axyl Greet W

THORN


96700596 AXYL GREETW M DWN 28L 930 WB HF ANT

LED 13W AXYL_GW_M_D930	IP65	IK06			
------------------------	------	------	---	---	--


Axyl Greet W

AXYL Greet W, a wall mounted, architectural LED luminaire for decorative facade lighting, with wide beam distribution. Class II electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: - 20°C to +50°C. Complete with 3000K LED..


Dimensions: 220 x 80 x 33 mm
Luminaire input power: 12.9 W
Luminaire luminous flux: 535 lm
Luminaire efficacy: 42 lm/W
Weight: 0.87 kg

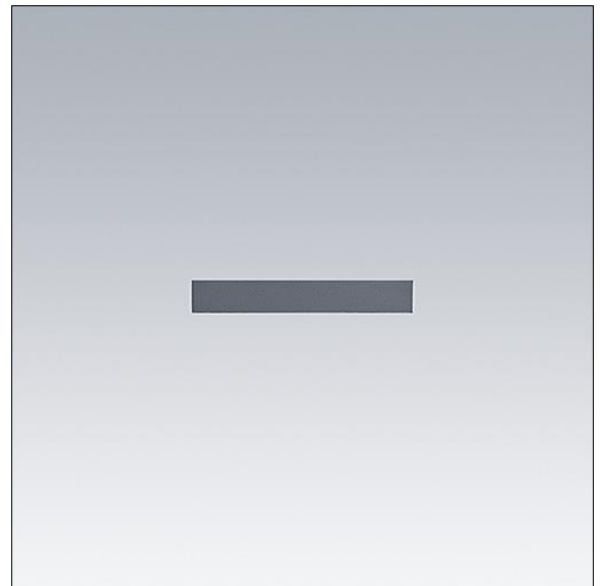

TLG_AXYL_F_GREET_W_M_ANT.jpg

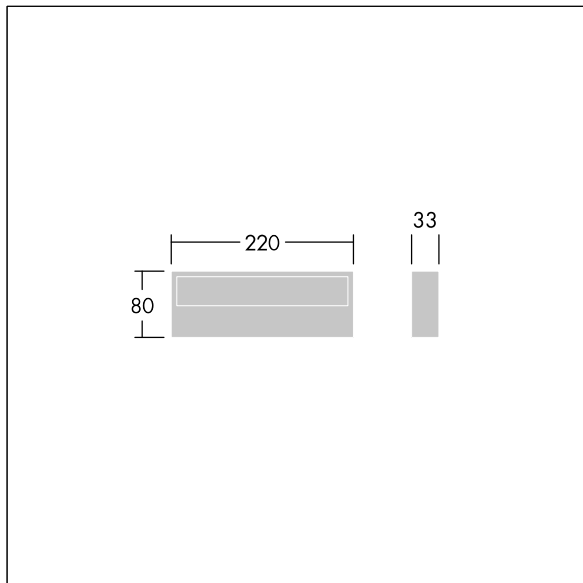

TLG_AXYL_M_GREET_W_M.wmf

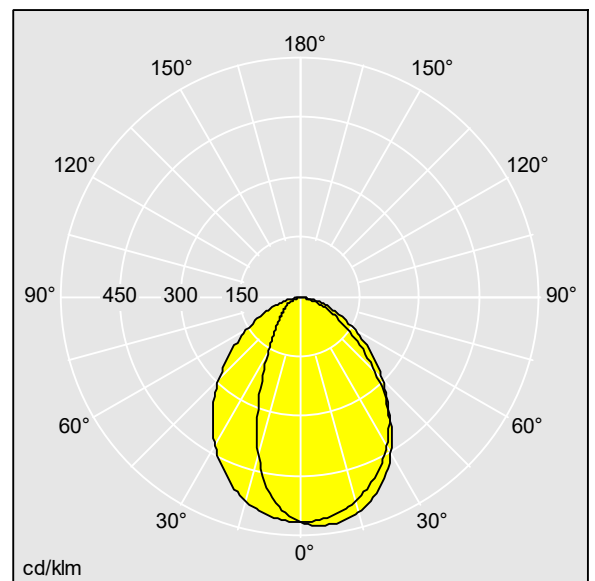

96700596.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 535 lm
Luminaire efficacy*: 42 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 12.9 W Power factor = 0.79
Dimming: FIX
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting