


Multistandard socket outlets



1. USE

Socket outlets : different international standards.

2. RANGE


MULTISTANDARD SOCKETS



Socket 2P+E 5/6/10/13 A 250 Vac and 127 Vac
2 modules

- HD4139
- HC4139
- HS4139

3. OVERALL DIMENSIONS (mm)

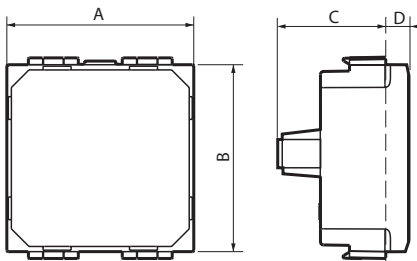

	A	B	C	D
H*4139	45	45	26.5	9.5

*Average overall dimensions depending of the standard.

4. CONNECTION

Screw clamps:

Stripping length, rigid or flexible cables: 9 mm

Automatic clamps:

Stripping length, rigid or flexible cables: 13 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate
Colour: Anthracite, White, Tech
Halogen free.
UV resistant.

Self-extinguishing:

- + 850° C / 30 s for insulating parts holding live parts in place.
- + 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC



Current: depending of the choice of the socket

Plug type	Diagrams	Current rating - Voltage
2 P+E BS standard		5 A - 250 V
2 P+E Indian standard		6 A - 250 V
2 P+E BS standard		13 A - 250 V
2 P+E Chines and australian standards		10 A - 250 V
2 P Indian standard		6 A - 250 V
2 P European standard		10 A - 250 V
2 P+E Argentine standard		10 A
2 P US standard		15 A - 127 V

Multistandard socket outlets

5. TECHNICAL CHARACTERISTICS *(continued)*

Current: depending of the standard of the country concerned

Plug type	Diagrams	Current rating - Voltage
2 P US standard polarised		15 A - 127 V
2 P+E US standard		15 A - 127 V

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

CEI 23-50 I ed. 1998-02
 PO 884-1 rev 0
 MPO 884-1 rev. 3
 GB 1002-1996
 IEC 60884-1
 IEC 60906-2
 NEMA WD6
 UL1681
 IS 1293: 2005
 B.S.546: 1950
 IS 1293: 2005