


# TX-MOVE

## 742162.003.1 | Surface mounted projector



Surface mounted projectors  
4051859755449  
L 569, B 119, H 75

Track on ceiling  
deep black, matt (RAL 9005)

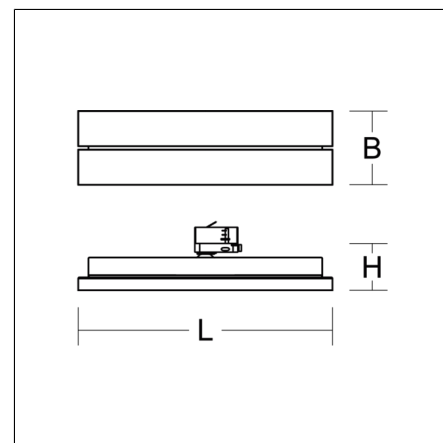

Multifunctional surface-mounted spotlight for area lighting. Very flat design. Housing: sheet steel, powder-coated. Rotation range: 356°. Swivel range: 90°. Consistent alignment possible with visible tilt scale. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Spezielle Mikrostrukturen reduzieren Gelbsaum. Symmetrical light distribution. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling. MultiLumen: Luminous flux adjustable in 3 steps. Factory setting is the highest luminous flux. Environmentally friendly and resource-saving due to replaceable and recyclable components.

### Product specifications

|                                              |                               |
|----------------------------------------------|-------------------------------|
| Length L                                     | 569 mm                        |
| Width B                                      | 119 mm                        |
| Height H                                     | 75 mm                         |
| Weight                                       | 2.05 kg                       |
| Light source                                 | LED                           |
| Colour temperature                           | 4000 K                        |
| Rated luminous flux                          | 6300 lm   8550 lm   10400lm   |
| System power                                 | 41 W   57 W   73W             |
| System efficiency                            | 142 lm/W   150 lm/W   154lm/W |
| Glare evaluation UGR (4H 8H)                 | 21,6   22,7   23,4            |
| Beam angle                                   | 85°                           |
| Rated life                                   | 50000 h (L80/B10)             |
| Colour rendering index (CRI)                 | 80                            |
| Colour tolerance                             | 3                             |
| Photobiological safety according to EN 62471 | Risk group 1                  |
| Driver                                       | Converter                     |
| Control                                      | on/off                        |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz    |
| Luminaires on B10A fuse                      | 8                             |
| Luminaires on B16A fuse                      | 13                            |
| Luminaires on C10A fuse                      | 13                            |
| Luminaires on C16A fuse                      | 21                            |
| Inrush current / Inrush current duration     | 53 A / 220 µs                 |
| CIE Flux Code / CEN Flux Code                | 77 96 99 100 100              |
| Type of protection                           | IP 20                         |
| Protection class                             | I                             |
| Filament test                                | 850 °C                        |
| Impact resistance                            | IK04                          |
| Ambient temperature                          | 5 °C ... + 25 °C              |
| Conformity mark                              | CE                            |

# TX-MOVE

742162.003.1 | Surface mounted projector



## Accessories



70319.003

Point outlet for 3-circuit multi adaptor